

MA SERIES

Operating Instructions



p m b ` t q d f l

a` = j l a b i = E` q = f k m r q F						
m ° - ° 3 i 2 = k	~ < £ ^ND	j ^ND	j ^RD	j ^RM	j ^ON	j ^RM
a £ ± i ° S ® 2 S	1 Ø Digital Ammeter					3 Ø Digital ammeter
a S ± ® a ~ .	4 digit 7 segment LED display			4 digit LCD with analog style bargraph indication		
a S ± ® a ~ . = °	~ ¥ £ 0 to 4960A			0 to 6200A		
f ~ ® 3 2 = ° ~ ¥ £	50mA to 5A AC					
f ~ ® 3 2 = c ° £	~ 3 £ ~ j . = = 50 / 60Hz					
j ~ ¶ = j ~ ~ 2 S	~ 3 - 3 ± = 6.2A					
f ~ ® 3 2 = ° ~ ¥ £						
' £ ° = ° ~ ~ ¥ £	£ = S ~ ° S i ~ 2 S ~ = "Or" for input > 6.2A					
` q = ® ° S ± £ 2	2 S ~ ¥ £ to 4000 (programmable in steps)			5 to 5000 (programmable in steps)		
` q = ± £ i = ± £ 2	2 2 S ~ ¥ 5A fixed					
o £ ± - a 3 2 S	~ 0.001, 0.01, 0.1, 1A (depending upon CT primary setting)					
b a £ i 2 ° S i ~	a = j ~ ~ ~ £ i 2 S ~ ~ 1 Ø - 2 wire				3 Ø - 4 wire	
p 3 ® - a a . 2 = - S ¥ £	240V AC (± 20%), 50 / 60Hz ; 110V AC (± 20%), 60Hz					
m - µ £ ° = j ~ ~	± 3 « ® 2 S ~ ~ 5VA max.			12VA max.		
t £ S ¥ ¶ 2	170gm	180gm	180gm	113gm	138gm	163gm
` b = ~ ~ ° = r i 2	YES	YES	CE ONLY	YES	YES	YES
` £ ° 2 S ~ S i ~						

a` = j l a b i = E p e r k q = L = a f o b ` q = f k m r q F						
m ° - ° 3 i 2 = k	j ^ND	j ^ND	j ^ND	j ^ND	j ^ND	j ^ND
a £ ± i ° S ® 2 S	1 Ø Digital Ammeter					
a S ± ® a ~ .	4 Digit 7 Segment LED Display			3 ½ digit 7 Segment LED Display		
a S ± ® a ~ . = °	~ 0 to 4960A	-1.999mA to +1.999mA	-19.99mA to +19.99mA	-199.9mA to +199.9mA	-1999mA to +1999mA	0 to 1.999 / 19.99mA
f ~ ® 3 2 = ° ~ ¥ £	MA12-50mV DC : 0 to 50mV MA12-75mV DC : 0 to 75mV MA12-100mV DC : 0 to 100mV	0 to ±2mA	0 to ±20mA	0 to ±200mA	0 to ±2000mA	0 to 2/20mA
f ~ ® 3 2 = c ° £	~ 3 £ ~ j . = = 50 / 60Hz					
j ~ ¶ = j ~ ~ 2 S	~ 3 - 3 ± = 6.2A	±1.999mA	±19.99mA	±199.9mA	±1999mA	1.999 / 19.99mA

a` = j l a b i = E p e r k q = L = a f o b ` q = f k m r q F						
m ° - ° 3 i 2 = k	j ^ND	j ^ND	j ^ND	j ^ND	j ^ND	j ^ND
' £ ° = ° ~ ~ ¥ £	"Or" for input > 6.2A	"Or" for input > ±1.999mA	"Or" for input > ±19.99mA	"Or" for input > ±199.9mA	"Or" for input > ±1999mA	"Or" for input > 19.99mA
p 3 ® - a a . 2 = - S ¥ £	0.001, 0.01, 0.1, 1A (depending upon shunt setting)	0.001	0.01	0.1	1	0.001/0.01
b a £ i 2 ° S i ~	a = j ~ ~ ~ £ i 2 S ~ ~ 1 Ø - 2 wire					
m - µ £ ° = j ~ ~	± 3 « ® 2 S ~ ~ 5VA max.					
p 3 ® - a a . 2 = - S ¥ £	240V AC (± 10%), 50 / 60Hz ; 110V AC (± 10%), 60Hz					
f ~ ® 3 2 = ° ~ ¥ £	Shunt	Direct				
t £ S ¥ ¶ 2	170gm	170gm	170gm	170gm	170gm	170gm
` b = ~ ~ ° = r i 2	YES	YES	YES	YES	YES	YES

Accuracy	: ± 0.5% of full scale
Measurement Method	: True RMS
Sampling Rate	: 3 samples / second
Burden	: 0.5VA at 5A AC (CT input)
Environmental Conditions	
Temperature	: Operating : -10°C to 55°C Storage : -20°C to 75°C
Humidity	: Up to 95% RH(non condensing)
Altitude	: Up to 2000 meters
Pollution degree	: II
Installation Category	: II (300V)
Protection Class	: II
Mounting	: Panel mounting

Ordering Information

Note : For CE and UL certified product, Add-CE ; -CU suffix to order code.
For example MA12-CU ; MA302-CE
For 110V Supply add -110V in order code
For example MA12-110V-CU ; MA302-110V-CE

t f o f k d = d r f a b i f k b p

⚠ WARNING

- To prevent the risk of electric shock, power supply to the equipment must be kept OFF while doing the wiring arrangement.
- Wiring shall be done strictly according to the terminal layout. Confirm that all connections are correct.
- Use lugged terminals.
- To reduce electromagnetic interference use of wires with adequate ratings and twists of the same in equal size shall be made with shortest connections.
- Layout of connecting cables shall be away from any internal EMI source.
- Cable used for connection to power source, must have a cross section of 0.5mm² to 2.5mm² (20 to 14AWG; 75°C(min)). These wires shall have current carrying capacity of 6A.
- Copper cable should be used (Stranded or Single core cable)
- Before attempting work on device, ensure absence of voltages using appropriate voltage detection device.

f k p q q ¶ l k = d r f a b i f k b p

⚠ CAUTION :

- This equipment, being built-in-type, normally becomes a part of main control panel and in such case the terminals do not remain accessible to the end user after installation and internal wiring.
- Conductors must not come in contact with the internal circuitry of the equipment or else it may lead to a safety hazard that may in turn endanger life or cause electrical shock to the operator.
- Circuit breaker or mains switch must be installed between power source and supply terminals to facilitate power 'ON' or 'OFF' function. However this switch or breaker must be installed in a convenient position normally accessible to the operator.
- Before disconnecting the secondary of the external current transformer from the equipment, make sure that the current transformer is short circuited to avoid risk of electrical shock and injury.
- The equipment shall not be installed in environmental conditions other than those mentioned in this manual.
- The equipment does not have a built-in-type fuse. Installation of external fuse of rating 275V AC / 0.5Amp for electrical circuitry / battery is highly recommended.

j b ` e ^ k=ff`K`pi q f l k

For installing the meter

1. Prepare the panel cutout with proper dimensions as shown below.

	Outline Dimensions (in mm)	Panel cutout Dimensions (in mm)
MA12		
MA501		
MA20XX		
MA302		

2. Push the meter into the panel cutout. Secure the meter in its place by pushing the clamp on the rear side. The clamps must be secured in diagonally opposite slots.

3. For proper sealing, tighten the screws evenly with required torque. Terminal screw tightening torque : 0.68 N-m to 0.79 N-m (6.018 In-Lb to 6.992 In-Lb) Screw clamp tightening torque : 0.1N-m (0.885 Lb-inch)

MAINTENANCE

1. The equipment should be cleaned regularly to avoid blockage of ventilating parts.
2. Clean the equipment with a clean dry or damp cloth. Do not use any cleaning agent other than water.


q b o j f k ^ i = ` l k k b ` q f l k p

MA12-AC / MA302	$\wedge = j l a b f i l p n F E q =$	
	$\wedge = j l a b i p f E a F q b ` q =$	
MA12-DC	$a ` = j l a b i p f E n F e q k q =$	
	$a ` = j l a b i p f E n F f q b ` q =$	


MA501	
MA201	
MA2301	
MA202	

t f o f k d = a f ^ d o ^ j


Case for MA12 AC Models (CT Input) / Case for MA302

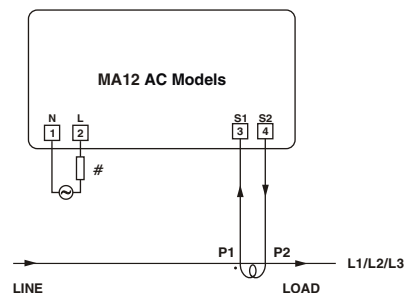


Case for MA12 AC Models (Direct Input)

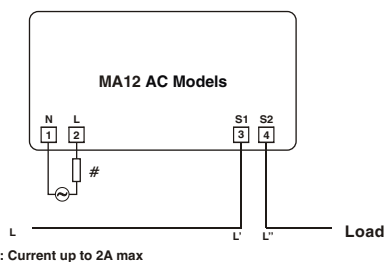


Case for MA12 DC Models (Shunt Input)

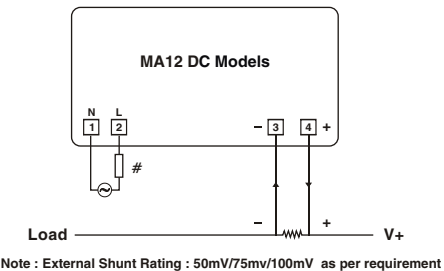


Case for MA12 DC Models (Direct Input)

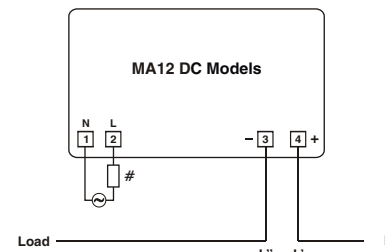


Case for MA2301

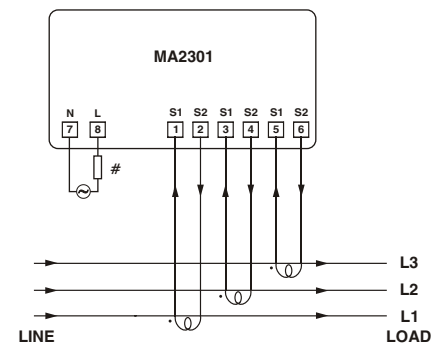


Case for MA201

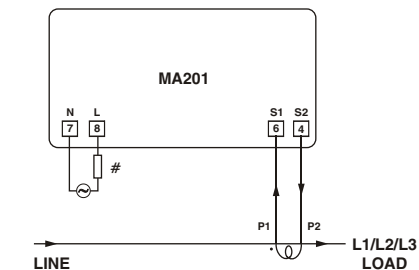

Case for MA501

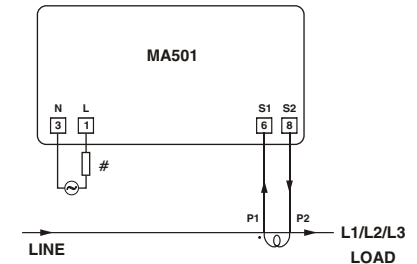

Case for MA202

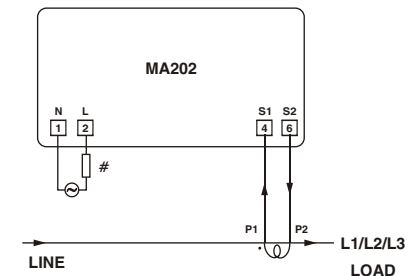

All fuse types : 0.5A class CC UL type ; 0.5A fast acting 600V

k l q b =

To enter into configuration mode : Press (●) switch for 5sec. after which,

- 1) For CT type models : "ctr" will be displayed initially. CT settings can be done in steps with every press of the tact key at rear side of the product.
 - 2) For shunt type models : "prg" will be displayed initially. Shunt settings can be done in steps with every press of the tact key at rear side of the product.
- CT / Shunt settings : 5, 10, 15, 20, 25, 30, 40, 50, 60, 75, 80, 100, 125, 150, 175, 200, 250, 300, 400, 500, 600, 630, 750, 800, 1000, 1200, 1500, 1600, 2000, 2250, 2500, 3000, 3200, 4000, 5000
(Note : The settings highlighted above are available only in MA201 / MA2301 / MA501)

To exit from configuration mode : switch OFF the unit and then switch ON or the unit will Auto Exit after 100sec. if no key is pressed.

Page scrolling can be done through different phase current pages with every press of the selector switch in MA2301.

(Specifications subject to change as development is a continuous process.)

Selec Controls Pvt. Ltd., India

Factory Address :

EL-27/1, Electronic Zone, TTC Industrial Area, MIDC, Mahape, Navi Mumbai - 400 710, INDIA.

Tel. No. : +91-22-28476443 / 1882

Fax No. : +91-22-28471733 | Toll free : 1800 227 353

Website: www.selec.com | Email: sales@selec.com