Terminal

Communication Terminal is a 4 pin removable terminal, which supports RS485 communication. A built-in 120 ohm resistance is used for longer distance communication (more than 300-meters), user can manually short Pin 1 & Pin 2 to suppress communication interference.



Port	PIN	Pin Definition	Remarks
COM3	1	R	120Ω Terminal resistance
	2	RS485 +	(A)
	3	RS485 -	(B)
	4	PE	Shield ground

HMI

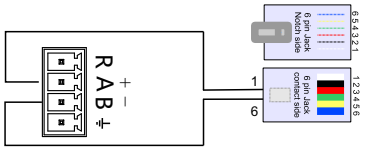

RS485, Terminal connection

Flexys Rail DIGIX-B

Certification

[redacted]

Device interfacing

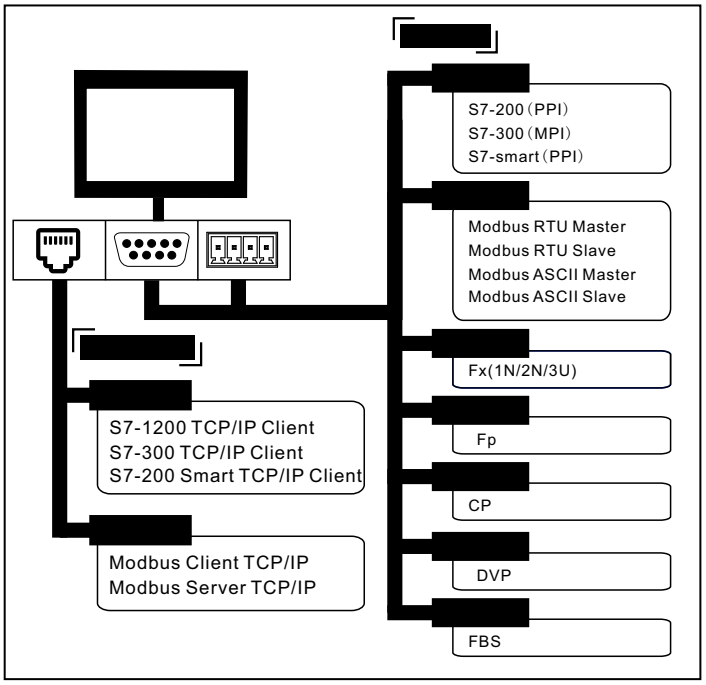

Ordering information

[redacted]

Accessories

AC-USB-USB-01-1M (USB type B - Downloading cable)