Auxiliary supply specifications

85 to 300V AC, 50 / 60 Hz, (±5%)

Environmental specifications

[redacted]

Dimensions (All are in mm)

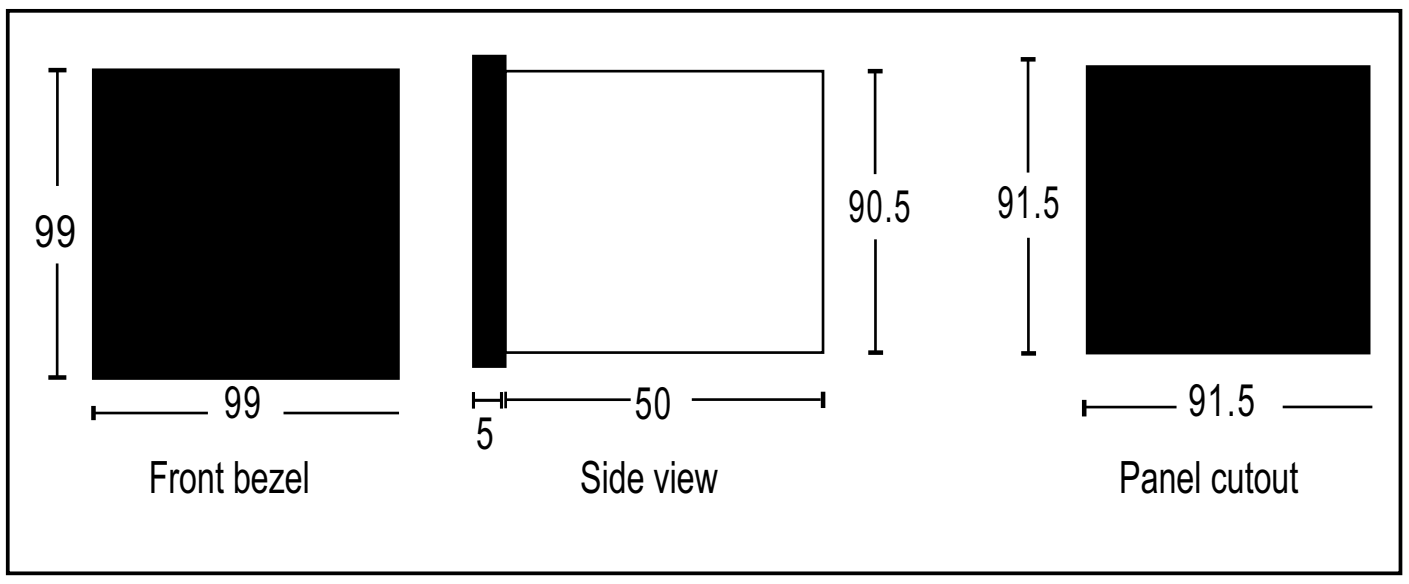
99
99
Front bezel
90.5
5
50
Side view
91.5
91.5
Panel cutout

Terminal connection

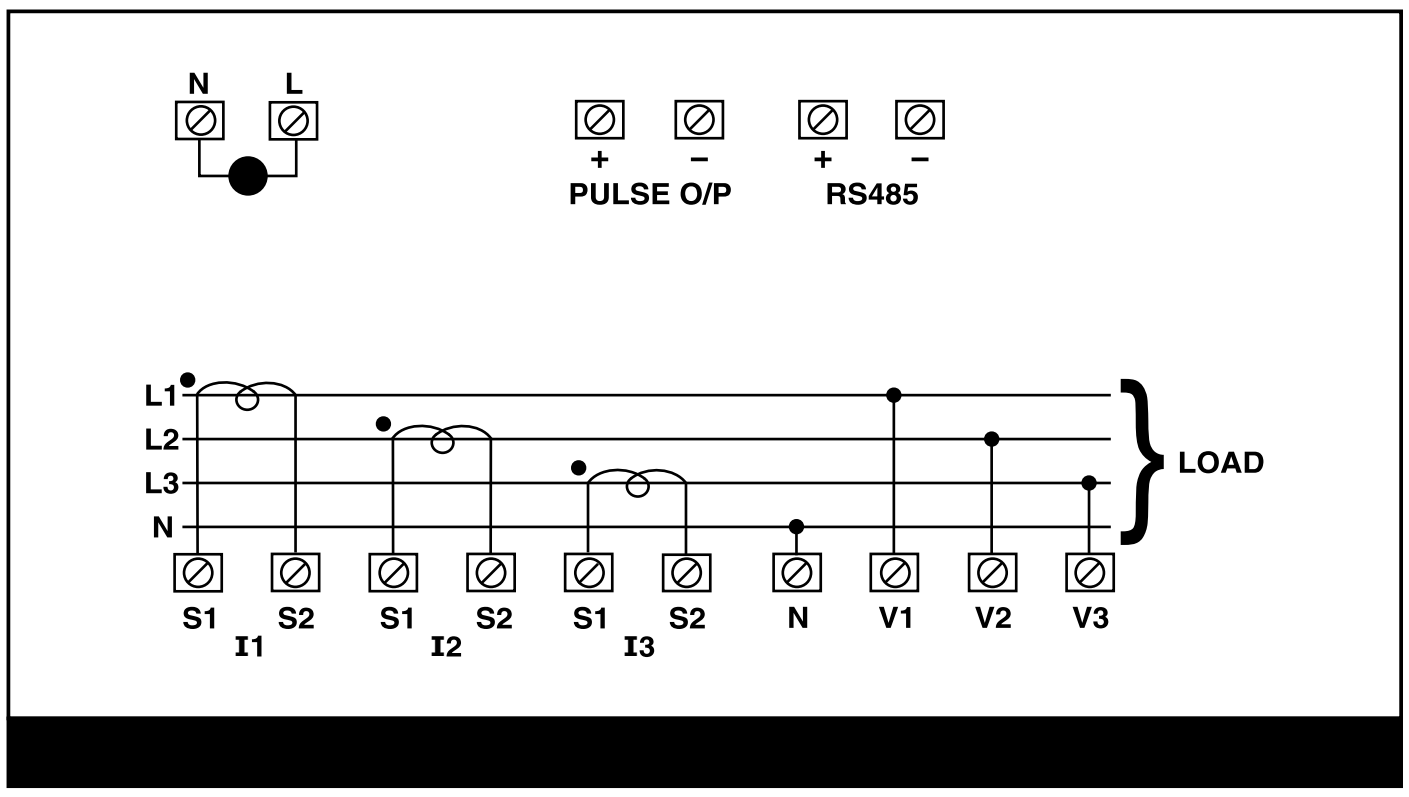
N
L
+
−
PULSE O/P
+
−
RS485
L1
L2
L3
N
LOAD
S1
S2
I1
S1
S2
I2
S1
S2
I3
N
V1
V2
V3

[redacted]

Compliance

[redacted]

Category	Standards compliance
Electrostatic discharge	IEC 61000 - 4 - 2
Immunity to electromagnetic RF fields	IEC 61000 - 4 - 3
Conducted immunity	IEC 61000 - 4 - 6
Immunity to magnetic fields	IEC 61000 - 4 - 8
Immunity to voltage dips and interruptions	IEC 61000 - 4 - 11
Fast transient	IEC 61000 - 4 - 4
Immunity to surge waves	IEC 61000 - 4 - 5
Conducted and radiated emissions	CISPR-22 / CISPR-11
Safety and Standards	
IEC61010 Edition 3.0 CAT III, Protection class II	
IEC 61326 - 1	

Ordering information

[redacted]