### Terminal Connections

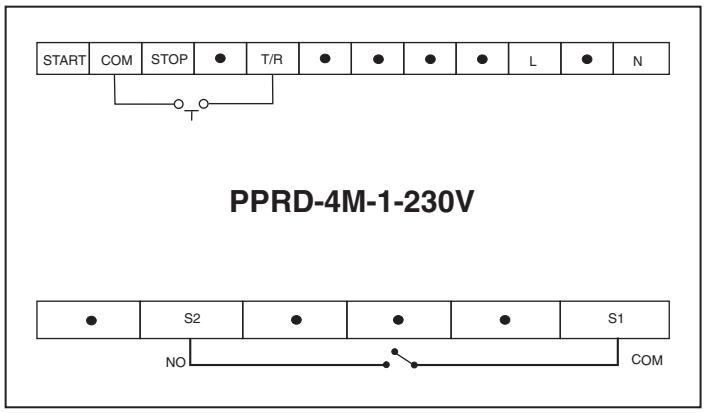


### Connection Diagram

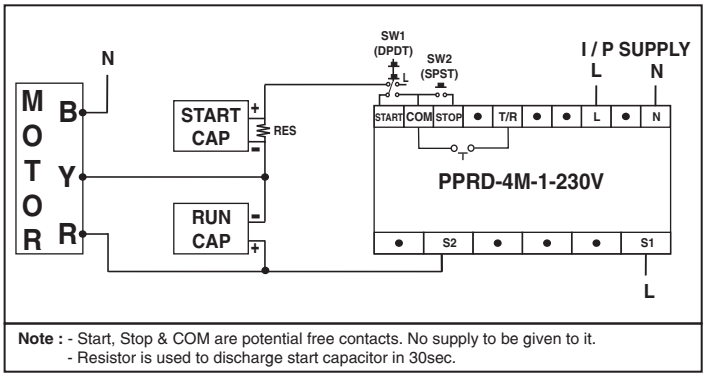


**Note :** - Start, Stop & COM are potential free contacts. No supply to be given to it.
- Resistor is used to discharge start capacitor in 30sec.

| Recommended resistor value as per different motor rating | |
|---|---|
| **Start Capacitor Value** | **Resistor Value** |
| Upto 200uF/300VAC | 100kOhm/2W |

(Minimum 30sec delay required between two consecutive starts.)

## Ordering Information

| Product code | Supply voltage | Certification |
|---|---|---|
| **PPRD-4M-1-230V** | 180V - 300V AC ( L - N ) | --- |