



DIN 22.5mm

Features :

- Forward - Pause - Reverse Timer
- LED indications : Relay 1 ON, Relay 2 ON

Display specifications

LED indications	Relay 1, Relay 2
-----------------	------------------

Input specifications

Accuracy	Setting : $\pm 5\%$ of full scale. Repeat : $\pm 0.5\%$ or 50 ms whichever is greater
----------	---

Output specifications

Relay contact	1 C/O each for Forward & Reverse
Contact rating	5A @ 250V AC / 24V DC, Resistive

Functional specifications

Modes	Forward-Pause-Reverse
Time ranges	1 / 2 / 4 / 8min (ON time) 10 / 20 / 40 / 80sec (Pause time)
Reset	On power interruption Reset time > 100msec

Auxiliary supply specifications

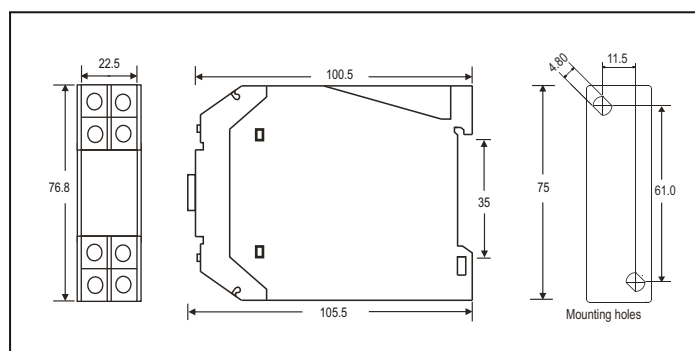
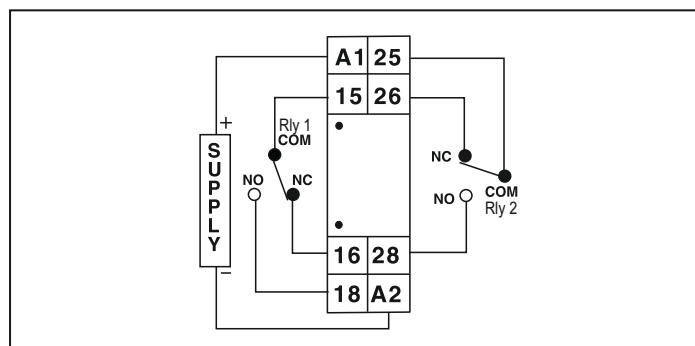
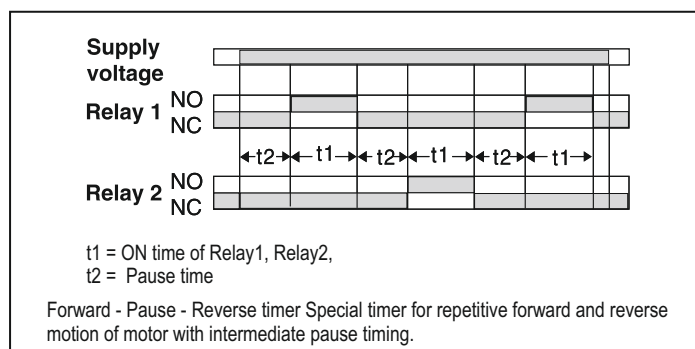
Supply voltage	20 to 240V AC (50 / 60Hz) 12 to 240V DC
----------------	--

Environmental specifications

Temperature	Operating : 0 to 50°C Storage : -20 to 75°C
Humidity (non - condensing)	95% RH

Mechanical specifications

Mounting	DIN rail
Weight	100 gms

Dimensions (All are in mm)**Terminal connections****Timing diagram****Ordering information**

Product code	Supply voltage	Certification
800XMR	20 to 240V AC 12 to 240V DC	---