



DIN 22.5mm

**Features :**

- Forward - Pause - Reverse Timer
- LED indications : Relay 1 ON, Relay 2 ON

**Display specifications**

|                 |                  |
|-----------------|------------------|
| LED indications | Relay 1, Relay 2 |
|-----------------|------------------|

**Input specifications**

|          |                                                                                             |
|----------|---------------------------------------------------------------------------------------------|
| Accuracy | Setting : $\pm 5\%$ of full scale.<br>Repeat : $\pm 0.5\%$ or 50 ms<br>whichever is greater |
|----------|---------------------------------------------------------------------------------------------|

**Output specifications**

|                |                                  |
|----------------|----------------------------------|
| Relay contact  | 1 C/O each for Forward & Reverse |
| Contact rating | 5A @ 250V AC / 24V DC, Resistive |

**Functional specifications**

|             |                                                                  |
|-------------|------------------------------------------------------------------|
| Modes       | Forward-Pause-Reverse                                            |
| Time ranges | 1 / 2 / 4 / 8min ( ON time)<br>10 / 20 / 40 / 80sec (Pause time) |
| Reset       | On power interruption<br>Reset time > 100msec                    |

**Auxiliary supply specifications**

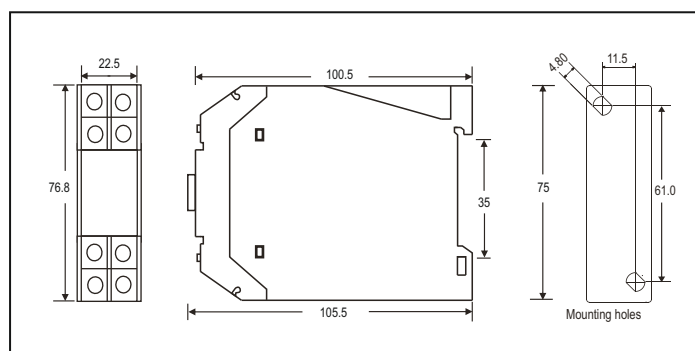
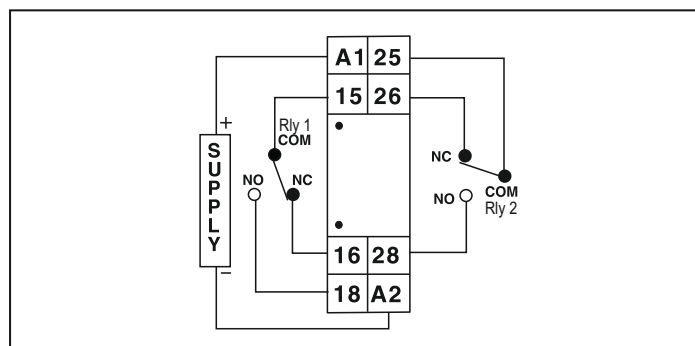
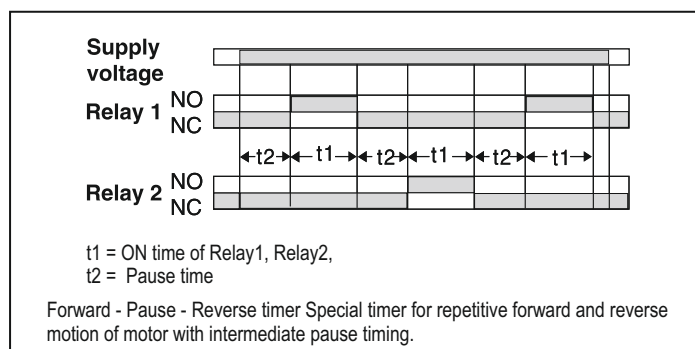
|                |                                            |
|----------------|--------------------------------------------|
| Supply voltage | 20 to 240V AC (50 / 60Hz)<br>12 to 240V DC |
|----------------|--------------------------------------------|

**Environmental specifications**

|                             |                                                |
|-----------------------------|------------------------------------------------|
| Temperature                 | Operating : 0 to 50°C<br>Storage : -20 to 75°C |
| Humidity (non - condensing) | 95% RH                                         |

**Mechanical specifications**

|          |          |
|----------|----------|
| Mounting | DIN rail |
| Weight   | 100 gms  |

**Dimensions (All are in mm)****Terminal connections****Timing diagram****Ordering information**

| Product code | Supply voltage                 | Certification |
|--------------|--------------------------------|---------------|
| 800XMR       | 20 to 240V AC<br>12 to 240V DC | ---           |