Terminal Connections

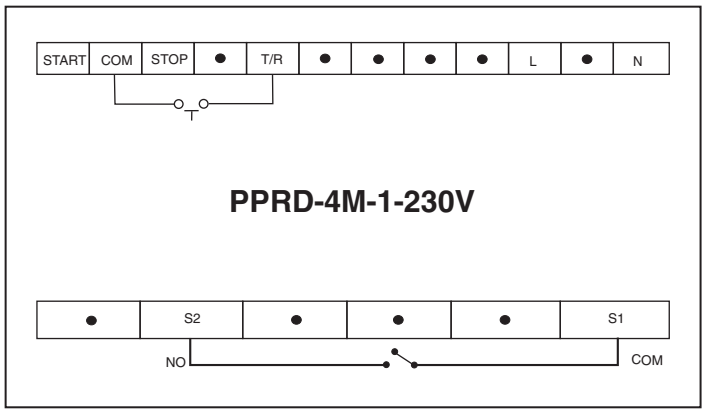

Connection Diagram

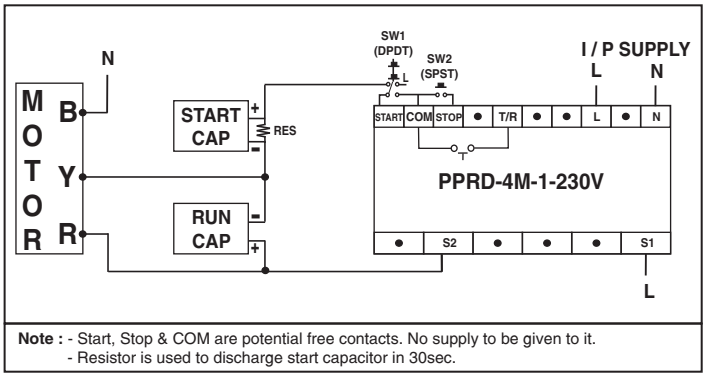

Note : - Start, Stop & COM are potential free contacts. No supply to be given to it.
- Resistor is used to discharge start capacitor in 30sec.

Recommended resistor value as per different motor rating	
Start Capacitor Value	**Resistor Value**
Upto 200uF/300VAC	100kOhm/2W

(Minimum 30sec delay required between two consecutive starts.)

Ordering Information

Product code	Supply voltage	Certification
PPRD-4M-1-230V	180V - 300V AC (L - N)	---