

PRELIMINARY DATASHEET



Features

- ◆ Modular PLC with pluggable / Independent display
- ◆ Flexible IO card selection
- ◆ RTC with time switch functions (Optional)



Technical Specification

Display specifications

Type	7 Segment LED	
Digits	4 Red	1 Red
LED banks	6 Red LED	
No. of keys	3 Keys (2 User configurable)	1 Key
No. of slots	2	

Input specifications

Digital input	
No. of inputs	3*
Input type	PNP
Input voltage range	5-30V
Response time	Depends on debounce time & ladder execution time
Debounce time	10ms
Fast input	
No. of inputs	1
Input type	PNP
Input frequency	5 kHz

* = 1 Digital input can be configured as analog input (0-10V)

Communication

Communication port	1 Port - RS485 slave
Communication protocol	MODBUS RTU
Connector type	2 Wire
Transmission type	Half duplex
Transmission speed	9600, 19200, 38400, 57600, 115200 bps
Data bits	7 or 8
Parity	None, Odd, Even, Space, Mark
Stop bits	1 or 2

Functional specifications

Functional features	
Programming	Windows based software for ladder programming & HMI config
Timer operational modes	On delay, Off delay, Pulse, Special (Up / Down) Timer
Timer resolution	1ms (Only accurate 1ms timer block)
Counter	Up counter, Down counter, Up-Down counter, Special (Up-Down counter)
Other blocks	Analog input / output, Time switch, RTC etc
RTC	No

Functional specifications

Memory	
Data memory	16Kb
Code memory	128Kb
EEPROM	8Kb
No. of objects	5000
Min. scan time	200usec
Typical scan time	1msec (Based on ladder programming)

Environmental specifications

Operating temperature	5 to 55°C
Storage temperature	-25 to 70°C
Humidity (Non condensing)	10 to 95%


Mechanical specifications

Mounting type	Rail mount
Weight	90 gms without IO cards


Supply specification

Supply voltage	24 VDC (18-30VDC)
Power consumption	4Watts

Dimensions (All are in mm)

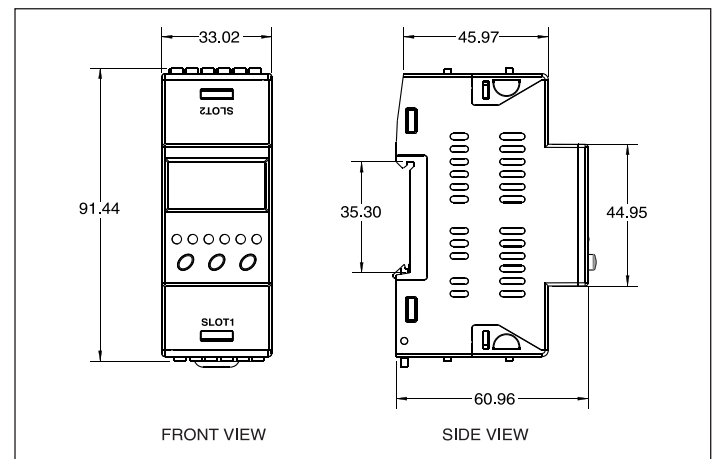

Terminal connection

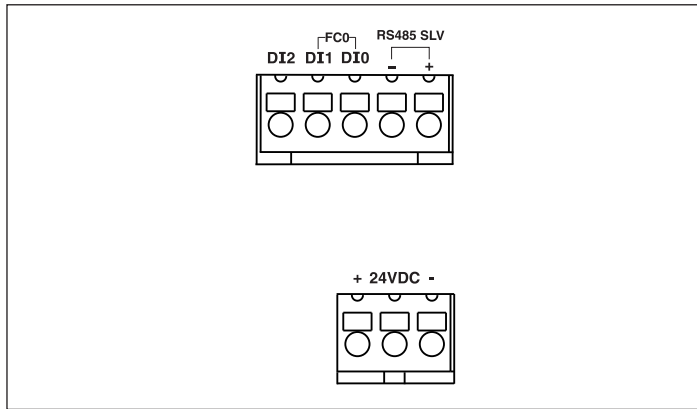

Ordering information

Product code	Description	Certification
MIBRX-2M-1-0-0-24VDC	24V DC Power supply without master communication & RTC	CE RoHS

Supported display modules

Display module	Description	Certification
MIBRX-DSP-2M-0-1-06-A	1-Digit (Red), 1-Key, 6-LED (Red) 7-Segment display	CE RoHS
MIBRX-DSP-2M-7-1-04-A	4-Digit (Red), 3-Key, 6-LED (Red) 7-Segment display	CE RoHS

Supported I/O cards

IO cards	Description	Certification
MIBRX-SC-DI04	4-Digital inputs card	CE RoHS
MIBRX-SC-DI06	6-Digital inputs card	CE RoHS
MIBRX-SC-RO03	3-Channel relay output card	CE RoHS
MIBRX-SC-RO04	4-Channel relay output card	CE RoHS
MIBRX-SC-TO04	4-Channel transistor output card	CE RoHS
MIBRX-SC-DI02-RO02	2-Digital input + 2-Channel relay output card	CE RoHS
MIBRX-SC-DI02-TO02	2-Digital input + 2-Channel transistor output card	CE RoHS
MIBRX-SC-AI02-I	2-Channel analog input card - Current	CE RoHS
MIBRX-SC-AI02-V	2-Channel analog input card - Voltage	CE RoHS
MIBRX-SC-AI02-V/I	2-Channel analog input card - Voltage/Current	CE RoHS
MIBRX-SC-AI02-NTC	2-Channel analog input card - NTC	CE RoHS
MIBRX-SC-AI02-PTC	2-Channel analog input card - PTC	CE RoHS
MIBRX-SC-AI02-TC	2-Channel analog input card - Thermocouple	CE RoHS
MIBRX-SC-AI02-RTD	2-Channel analog input card - RTD	CE RoHS
MIBRX-SC-AI02-PT1000	2-Channel analog input card - PT1000	CE RoHS
MIBRX-SC-AO01-V/I	1-Channel analog output card - Voltage/Current	CE RoHS
MIBRX-SC-FI02	2-Channel fast input card	CE RoHS
MIBRX-SC-FO02	2-Channel fast output card	CE RoHS
MIBRX-SC-LC02	2-Channel loadcell input card	CE RoHS

Accessories

Accessories for communication	
AC-USB-RS485-02 (Program downloading cable - USB to 2 pin open wire)	
Power Supplies	
RP-2M-1.1A-24VDC-CE-RoHS	
RPS60-24-CE-RoHS	
RPS120-24-CE-RoHS	
RPS240-24-CE-RoHS	
Window - Based software for ladder programming - www.selec.com/software	
Relay modules	
1) RLYMD-1-S4-1CO-24VDC	: 4 Channel 1 change over relay module
2) RLYMD-1-S4-2CO-24VDC	: 4 Channel 2 change over relay module
3) RLYMD-2-S8-1CO-24VDC	: 8 Channel 1 change over relay module
4) RLYMD-2-S8-2CO-24VDC	: 8 Channel 2 change over relay module
5) ERLYMD-2-1-S8-1CO-24VDC	: 8 Channel 1 change over communication based relay module