Supply Specification

VAR IN_OUT & VAR OUTPUT types Variables Maximum Retention 25 variables only each of 32 bit @110V, @24VDC

Dimensions (in mm)

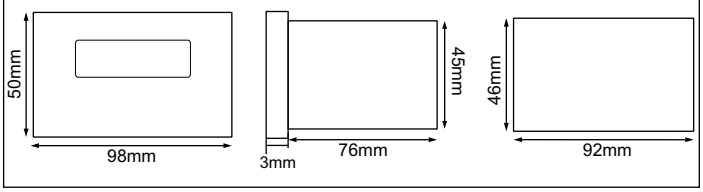

Terminal Connections

TWIX-1-230VDC

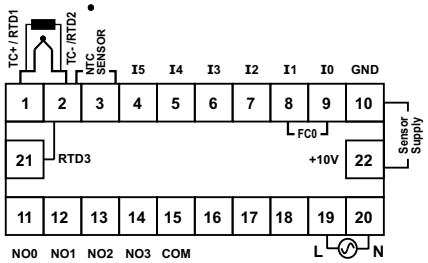

TWIX-1-24VDC

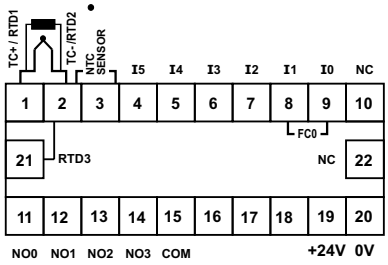

Rs485 on Side Terminal
(Communication Port 1)

Port Description

PIN

Ordering Information

CE

CE

Accessories (To be ordered separately)