ATSEL HMI (Human Machine Interface)

Temperature	Storage : -20 ~ 60° C	Storage : -20 ~ 70°C
Humidity	10 ~ 90% RH (Non-condensing)	
Seismic performance	10 ~ 25Hz (2G / 30min in x, y, z directions)	
Protection level of front panel	Comply with IP65 certification (4208-93)	
CE Certificate	According to CE Certification (EN61000-6-2:2005 / EN61000-6-4:2007)	

Dimensions & External ports (All dimensions are in mm)

Panel cutout **4.3" HMI**

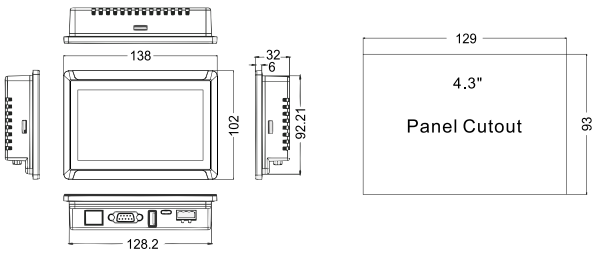

SP112-GT40-S1-CE , SP112-GT40-ET1-CE

4.3" HMI

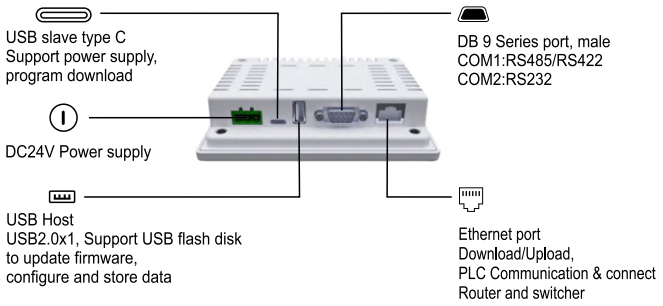

SP112-GT40-S1-CE , SP112-GT40-ET1-CE

Panel cutout **7" HMI**

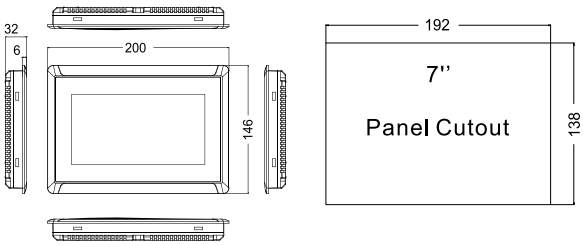

SP112-GT70-S1-CE , SP112-GT70-ET1-CE

Panel cutout **10" HMI**

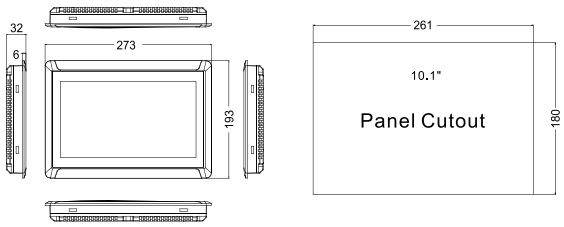

SP112-GT100-ET1-CE

7" HMI **10" HMI**

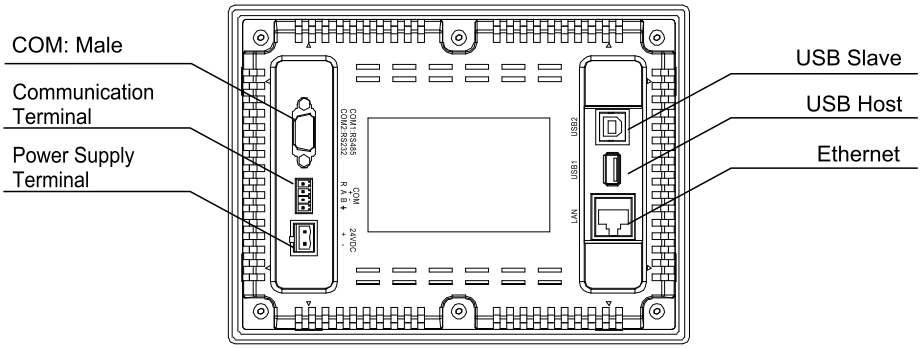

SP112-GT70-S1-CE , SP112-GT70-ET1-CE
SP112-GT100-ET-CE