

Features :

- Plug in module
- Easy to connect & replace in Flexys GT35, Flexys rail, Flexys Panel TX4 & EXP FLEX 2M
- Configured via selpro software
- Spring type pluggable terminals


Specifications

No of outputs	8 Nos
Response time	20 ms (selectable through software via debounce parameter)
Relay output rating	NO Type : 5A @230VAC, 5A @30VDC
Isolation between outputs	2.5kV

General specifications


Ambient operating temperature	0°C to 55°C
Humidity	95%
Ambient storage temperature	-20°C to 70°C
Weight	40gms

Terminal diagram

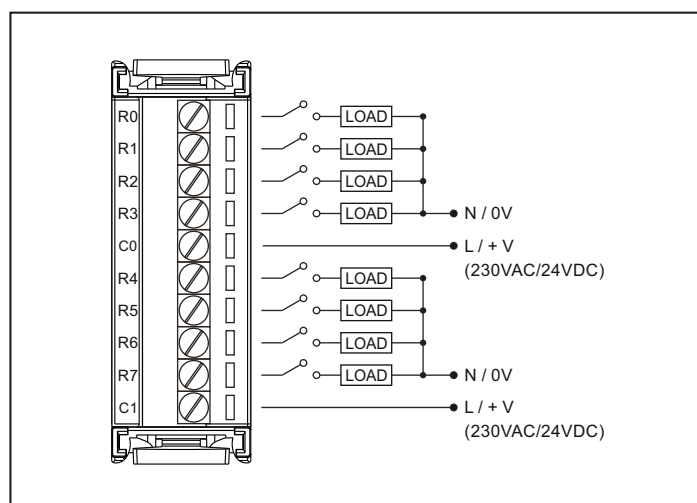

Ordering information

Product code	Description	Certification
FL-SC-RO08-CE-RoHS	8 Channel relay output card	CE RoHS



Features :

- Plug in module
- Easy to connect & replace in Flexys GT35, Flexys rail, Flexys Panel TX4 & EXP FLEX 2M
- Configured via selpro software
- Spring type pluggable terminals


Specifications

No of outputs	8 Nos
Output type	PNP
Rated voltage	100 mA at 24VDC
Output current	100mA max. per output
Response time	10 ms (Selectable through software via debounce parameter)
Short circuit protection	Yes
Reverse polarity protection	Yes
Isolation between outputs	2.5kV

General specifications

Ambient operating temperature	0°C to 55°C
Humidity	95%
Ambient storage temperature	-20°C to 70°C
Weight	40gms

Terminal diagram

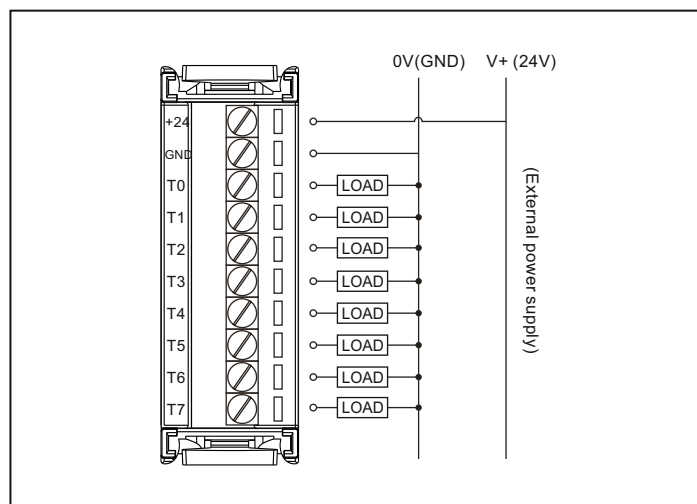

Ordering information

Product code	Description	Certification
FL-SC-T008-CE-RoHS	8 Channel transistor output card	CE RoHS