

selec

XT56A / XT264A / XT364A

Operating Instructions



SPECIFICATIONS


DISPLAY	XT56A : 3 digit, 0.40" Height, Red 7 segment LED. XT264A : 3 digit, 0.56" Height, Red 7 segment LED. XT364A : 3 digit, 0.56" Height, Red 7 segment LED.
SET POINT	Single set point.
SUPPLY	90 to 270V AC/DC , AC: 50 or 60 Hz.
DELAY MODES	On delay / Interval.
TIME RANGES	9.99, 99.9, 999 sec 99.9, 999 min 99.9, 999 hr
TIME SETTING	By push wheel switches.
ACCURACY	±0.05% or 50 msec (whichever is greater).
START INPUT	Pulse Start.
RESET	1)Front panel reset. 2)Remote Reset. 3)On power interruption.
RESET TIME	Less than 100 msec.
COUNT DIRECTION	Down.
LED INDICATION	Relay status
OUTPUT	2 Relay (SPDT)
RELAY RATING	5A @ 250VAC / 30VDC
MOUNTING	Panel mounting.
TEMPERATURE	Operating: 0 to 50°C Storage: -5 to 55° C.
HUMIDITY	95% RH.
WEIGHT (gms)	XT56A : 120 XT264A : 210 XT364A : 220

MECHANICAL INSTALLATION

PRODUCT CODE


MODELS	DIGITS	BEZEL SIZE(mm)
XT56A	3	48 x 48
XT264A	3	72 x 72
XT364A	3	96 x 96

OVERALL DIMENSIONS (All dimensions in mm)

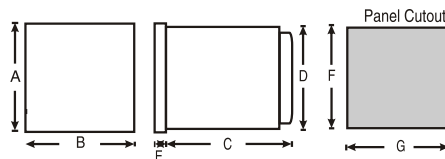

DIM MODELS	A	B	C	D	E	F	G
XT56A	52	52	76	45	4	46	46
XT264A	76	76	83.7	67	4.5	69	69
XT364A	100	100	73	90.5	5	92	92

TIMING DIAGRAM

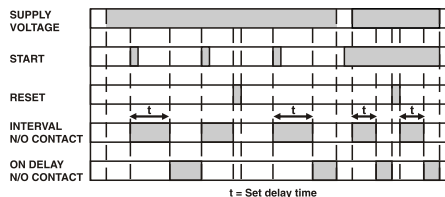

SAFETY PRECAUTIONS

Please maintain these instructions and Review them prior to using the unit:

⚠ Warning:


1. This unit is panel mounted type with its output terminals getting connected to the host equipment. Such equipment shall also comply with basic EMI/EMC and safety requirements like BS EN 61326-1 and BS EN 61010 respectively.
2. To avoid electric shock, power supply of the unit should be kept off while wiring. Wiring should be done strictly as per the terminal layout, given in the manual.
3. Use lugged terminals to meet M3 screws.

⚠ Caution:


1. This unit is not intended for outdoor use.
2. The power connection cable must have a cross-section of atleast 1mm² and insulation capacity of atleast 1.5kV.
3. The output connections must not be loaded beyond the specified values/range.
4. Avoid inflow of dust and contact of conductive material with the internal circuitry of the unit.
5. The unit must not operate in presence of heating sources, caustic vapors, oil, steam, vibration or impact etc.
6. Use clean soft cloth for cleaning. Do not use any organic solvents like Isopropyl alcohol. Care must be taken to avoid entry of water into the circuitry through the ventilation holes.

TERMINAL CONNECTIONS


XT56A



XT264A



XT364A



DIP SWITCH SETTING

DIP SWITCH SETTINGS FOR MODE

MODE	SW 1
ON DELAY	OFF
INTERVAL	ON

DIP SWITCH SETTINGS FOR TIME RANGE

RANGE	SW2	SW3	SW4
9.99 sec	OFF	OFF	OFF
99.9 sec	OFF	OFF	ON
999 sec	OFF	ON	OFF
99.9 min	OFF	ON	ON
999 min	ON	OFF	OFF
99.9 hr	ON	OFF	ON
999 hr	ON	ON	ON

DIP SWITCH SETTING EXAMPLE




Mode - INTERVAL

Range - 99.9 Sec.

NOTE : DIP switch for range and mode settings is on the side of the Instrument.

LOAD CONNECTIONS



1) Snubber Part No.: APRC - 01.

2) MOV Part No.: AP-MOV - 03.

Note: For inductive loads, use of snubber and MOV, as shown above, is recommended.

(Specifications subject to change as development is a continuous process).

Selec Controls Pvt. Ltd., India.

(Formerly Selectron Process Controls Pvt. Ltd.)

Tel:91-22-28476443/1882, Fax:91-22-28471733,

Toll free: 1800 227 353, Web.: www.selec.com

E- mail: sales@selec.com.