Power ON delay	<400msec
Trip time delay	<250msec
Response time	<250msec
Recovery time	<250msec
Operating temperature	0 ºC to +50 ºC
Storage temperature	-20 ºC to +70 ºC
Relative humidity (non-condensing)	Up to 95% RH
Degree of protection	IP20 for terminals IP50 for enclosure
Degree of pollution	
For product	III
For PCB	II
Mounting	DIN rail mount & Wall mount
Weight	70gms
Screw tightening torque	0.5NM

Terminal connections

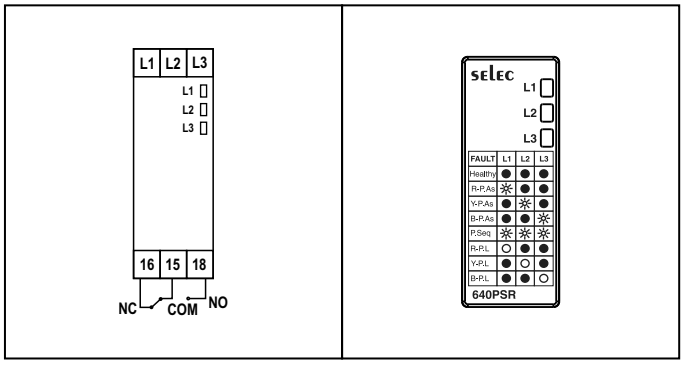

Dimensions (all are in mm)

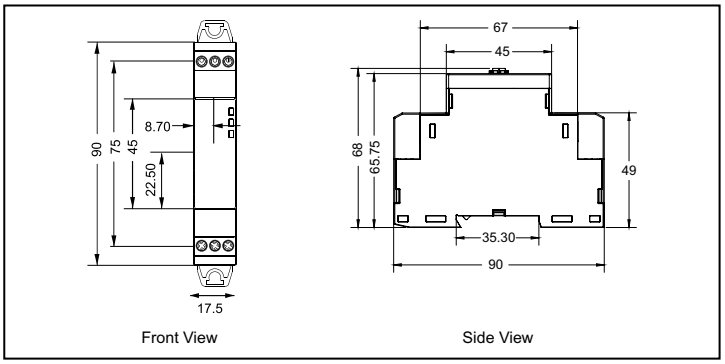

Timing diagram

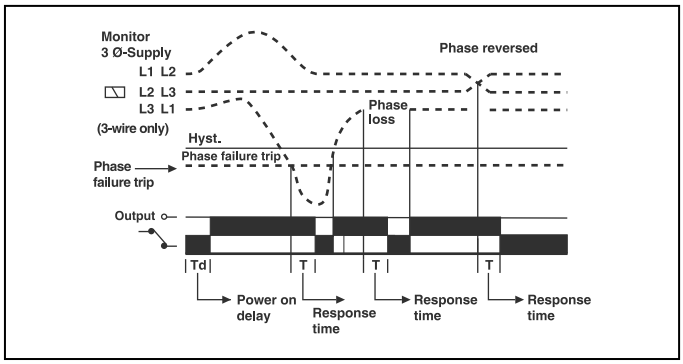

Ordering information

640PSR-CE	154 to 520V AC	