



36 x 72mm

### Features :

- 3 Digits, 7 Segment LED single white display
- Capacitive touch keypad
- LED status indicator : Set point lock, Defrost, Relay ON
- °C / °F selectable
- Defrost management
- IDM applicable
- Compact size

Certifications :

### Display specifications

Display	3 Digits 7 Segment LED single white display
LED indications	Set point lock, Defrost, Relay ON

### Input specifications

Inputs	NTC
Resolution	1 / 0.1°
Setpoints	1
Indication accuracy	±1% of Full scale

### Output specifications

Relay contact	SPDT 10A @ 250V AC
Special feature	IDM

### Functional specifications

Control action	ON - OFF
Hysteresis	0.1 to 9.9
Display offset adjustment	-19.9 to 20.0
Restart time delay	Adjustable from 00 to 99 minutes
Relay action	Heat & cool mode
Defrost time	Programmable from 00 to 99 minutes
Defrost frequency	Programmable from 00 to 99 (Hr / Min / Sec)

### Specifications for NTC sensor

Sensor type	NTC probe
Thermistor range	-40 to 90°C
Nominal resistance	10K ohms @ 25°C


### Auxiliary supply specifications

Supply voltage	230V AC @ (50 / 60Hz)
Power consumption	3 VA max @ 230V AC


### Environmental specifications

Temperature	Operating : 0 to 50°C (32 to 122°F) Storage : -20 to 75°C (-4 to 167°F)
Humidity (non - condensing)	95% RH
Weight	150 gms

### Dimensions (All are in mm)

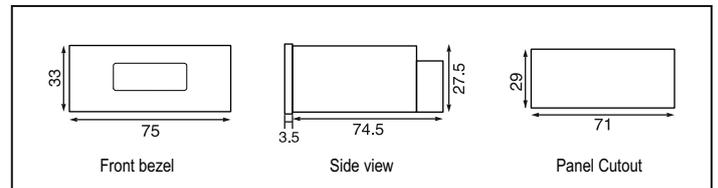

### Terminal connections

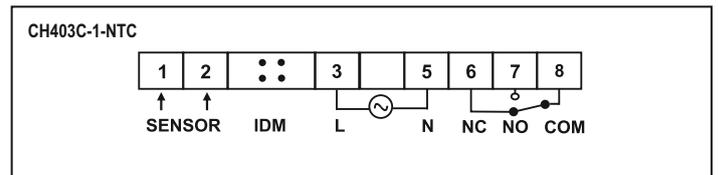

### Compliance

#### Applicable EMI / EMC Standards

Product Standard : IEC 61326-1

Category		Standards Compliance
ESD Immunity	IEC 61000-4-2	Level III
Surge Immunity	IEC 61000-4-5	+/- 2 kV common mode, +/- 1 kV differential mode
Radiated Susceptibility	IEC 61000-4-3	Level III, 80 to 1000MHz Level II, 1.4GHz to 2GHz Level I, 2GHz to 2.7GHz
Conducted Susceptibility	IEC 61000-4-6	Level II
Voltage Dips and Interruptions	IEC 61000-4-11	<b>Dips</b> : 0% residual voltage / 1 cycle (Criteria B), 40% residual voltage / 10 cycles 50Hz / 12 cycles 60Hz (Criteria C) 70% residual voltage / 25 cycles 50Hz / 30 cycles 60Hz (Criteria C) <b>Interruptions</b> : 0% residual voltage / 250 cycles 50Hz / 300 cycles 60Hz (Criteria C)
Conducted Emission	CISPR-11	
Radiated Emission	CISPR-11	
Electrical Fast Transient	IEC 61000-4-4	Level III

### Ordering information

Product code	Control Output	Supply Voltage	Certification
CH403C-1-NTC	RELAY	230V AC	CE

### Sensor provided with product

NTC Sensor (see Specifications of NTC Sensor for details)	TSP04
--	-------


### Accessory(Also available separately on request)

<b>PROBE</b>
--------------



MODEL	Sensor type	Temperature range (°C)	Nominal Resistance
TSP04	NTC probe	-40 to +100	10 K ohms @ 25°C

### Independent Downloader Module (IDM)

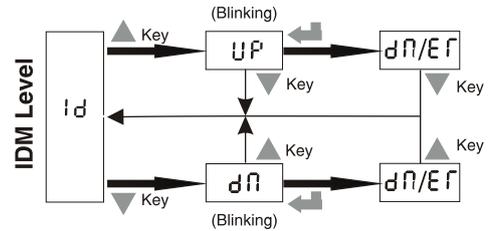

#### IDM Level

Display	Parameter Description
Id	Independent Downloader Module
UP	Upload from product to IDM
dL	Download from IDM to product
dU	Operation Successful
Er	Operation unsuccessful