

Supply voltage	90 to 270V AC / DC (50 / 60Hz)
Power consumption	5 VA max @ 230V AC
Temperature	Operating : 0°C to 50°C; Storage : -20°C to 75°C
Humidity (non - condensing)	95% RH
Mounting	Panel
Weight	DTC224 - 164 gms ; DTC324 - 217 gms

Terminal connections

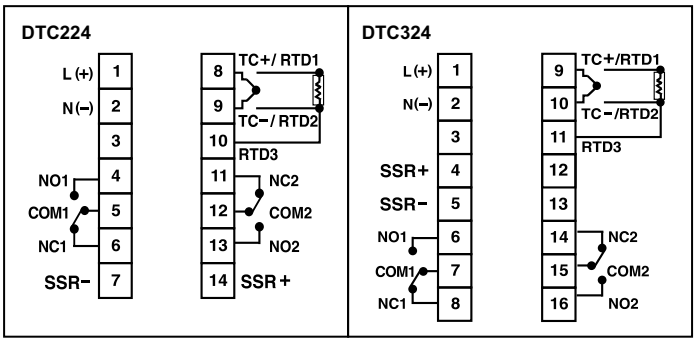

Dimensions (All are in mm)

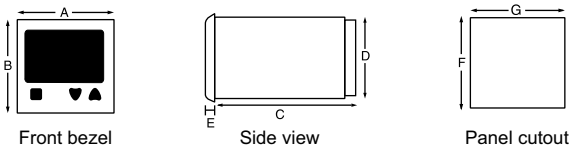

MODELS / DIM	A	B	C	D	E	F	G
DTC224	76	76	44	67	4.5	69	69
DTC324	99	99	39	90.5	3.5	92	92

Ordering information

DTC224	RELAY (5A)	SSR (12V DC)	RELAY (5A)	90 to 270V AC / DC	- - -
DTC324	RELAY (5A)	SSR (12V DC)	RELAY (5A)	90 to 270V AC / DC	- - -