



DIN 70mm

## Features :

- MID B+D Certified
- 3 $\emptyset$  True RMS (Voltage, Current)
- 3 $\emptyset$  Power (Active, Reactive, Apparent)
- Energy (Active, Reactive)
- Max Demand of Power
- Plug-n-Wire, RJ45 Connector Current Input
- Independently programmable CT ratios (Load 1 and Load 2)
- Modbus RTU Communication (RS485)
- Two Pulse Output
- Self Powered

Certification :   

## Display Specifications

Display Type	LCD, high definition with white back-light
Digit height	6.35mm (displayed parameter)
Page scrolling	Manual / Auto scroll mode by front key
Energy maximum display	9999999
Resolution	For energy : 0.01k, 0.1k, 1k, 1M, 0.01M, 0.1M (depending upon CT ratio x PT ratio) For Power, Voltage, Current : Auto Resolution For Power Factor : 0.001

## Input specification

Connection	Three phase four wire
Input voltage range	3 x 85 to 240V (L-N) 3 x 147 to 415V (L-L)
Voltage rated burden	<8VA
Nominal current input	RJ45 - 1A (330mV)
Max current (Imax)	RJ45 - 1.2A (396mV)
Current Rated Burden	NA
Starting current	2mA (0.66mV)
Short time overcurrent	30 x Imax to IEC/EN62053-21 + 23
Impulse voltage withstand	6kV 1.2/50 $\mu$ S 0.5J
AC voltage withstand	4kV 50Hz for 1 min
CT primary current	5 to 6000A
PT primary voltage	100 to 600V
Frequency	50Hz
Current distortion factor	According to IEC/EN50470
Programming access	Password protected (user selectable)
Memory retention	Non volatile memory
<b>Accuracy</b>	
Voltage	0.5% of full scale
Current	0.5% of full scale
Frequency	Frequency : $\pm 0.1\%$ For L - N Voltage >20V For L - L Voltage >35V
Power factor	1% of unity
Active power	1%
Reactive power	1%
Apparent power	1%
Active Energy	Class 1, Class B (IEC/EN62053-21, IEC/EN50470)
Reactive Energy	Class 2 (IEC/EN62053-23)
Displayed Parameters	Voltage - L-L, L-N and average Current - Per phase and average (LOAD 1 and LOAD 2) Power Factor - per phase and average

Frequency	Power - Active, Reactive and Apparent (per phase and total) Power Max. demand - Active and apparent power. Energy - Active, reactive and (per load and total)
Settable parameter	CT Primary current PT primary voltage PT secondary voltage Communication address Communication speed (Baud) Communication Parity Communication number of stop bits Back-light time-out period Demand period (for integration) Pulse duration Pulse output (kWh) Reset to Factory Default Reset Energy and Maximum Demand Reset Active Energy Reset Reactive Energy Reset Apparent Energy Reset Maximum Current Reset Maximum Active Power Reset Minimum Active Power Reset Maximum Reactive Power Reset Minimum Reactive Power Reset Maximum Apparent Power

**NOTE: Once Programming Mode Is entered The values in red will be locked out after 15 mins. No further adjustment is possible without return to factory.**

## Auxiliary Supply specification

Voltage range	60 to 300V AC, 50 / 60Hz ( $\pm 5\%$ ), Self Supplied (V1, N)
Operating frequency	45 to 65Hz
Power consumption	8 VA max

## Output Specification

Energy pulses	
Number of pulse outputs	2
Pulse output function	kWh
Pulse output Max. current	100mA
Pulse output voltage range	5 to 27V DC
Pulse duration	50 / 100 / 150 / 200 / 250 / 300ms

## Communication

Communication type	RS485
Communication protocol	Modbus
Address	1 to 255
Number of bits	8 bits
Parity	None, odd, even
Baud rate	300, 600, 1200, 2400, 4800, 9600, 19200
Required response time to request	≤100ms
Number of meters connected on the bus	32 (up to 255 with RS485 repeater)
Max distance from Master device	500M

## Insulation

Installation category	III
Pollution degree	2
Insulation voltage rating	300V (L-N)

## Environmental Conditions

Reference temperature	23°C ±2°C
Specified temperature operating range	-10°C to +55°C
Storage temperature	-20°C to +75°C
Relative humidity	0 to 85%, non condensing
Mechanical environment	M1
Electromagnetic environment	E2


## Mechanical

Housing	4 module DIN 43880
Mounting	Snap-on 35mm rail
Tamper sealing	Meter housing (by means of a tamper evident seal). Sealable terminal covers
Housing material	Self-extinguishing polycarbonate (UL94 V-0)
Protection degree (IEC/EN60529)	IP20 (terminals), IP54 (front of housing)
Weight	<210g


## Termination

Current input terminal type	2 x RJ45
Max. wire size	N/A
Voltage input terminal type	Pluggable terminal block - Screw clamp type
Max. wire size	2.5mm <sup>2</sup>
Voltage output terminal type	Pluggable terminal block - Screw clamp type
Max. wire size	2.5mm <sup>2</sup>
Communication output (RS485 and Pulse)	Pluggable terminal block - Screw clamp type
Max. wire size	1.5mm <sup>2</sup>

## Dimensions (All are in mm)

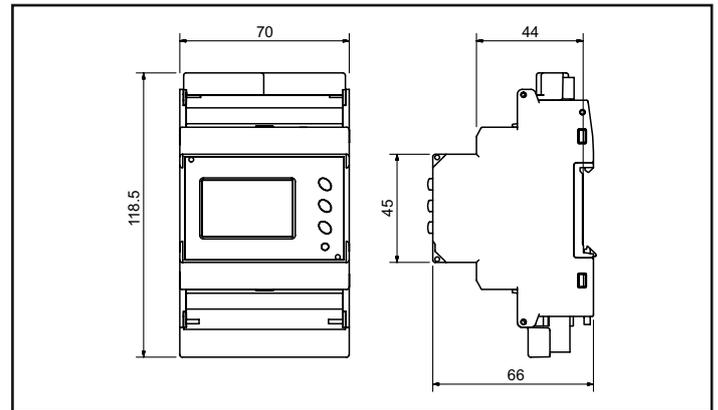

## Terminal Connections

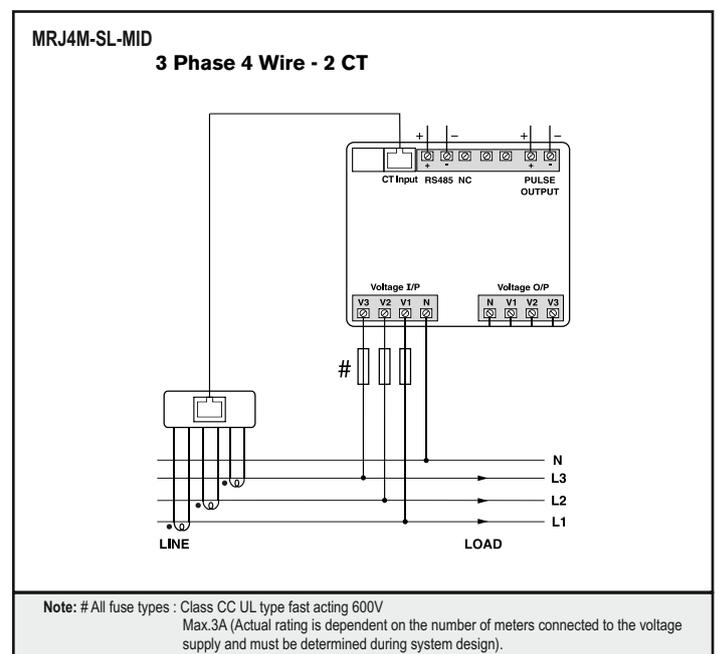

## Conformity

<b>Applicable EMI / EMC Standards</b>
Product Standard : IEC 61326 - 1
<b>Electromagnetic compatibility</b>
IEC/EN61326-1, IEC/EN55011 Class A
IEC/EN61000-4-2, -3, -4, -5, -6, -8, -11
IEC/EN50470-1/3
<b>Accuracy and functionality</b>
IEC/EN50470-1/3
IEC/EN62053-21
IEC/EN62053-23
DIRECTIVE 2014/32/EU
IEC/EN62053-31
<b>Safety</b>
IEC/EN61010

## Ordering information

Product code	Communication	Certification
MRJ4M-SL-MID	RS485 Modbus output	 CE