Features :

- **Single Set Point**
- **On delay/ Interval**
- **2 C/O SPDT**
- **6 Time Ranges**
- **Down Counting**


72 x 72mm **96 x 96mm**

Technical specifications


Display	3 digits, 7 segment LED	
LED Indications	Relay ON	
Accuracy	±0.05% of F.S. or 50msec	
Start input	Pulse start	
Contact rating	Relay: NO: 10A 250 VAC/ 24 VDC NO/ NC: 5A/ 5A 250 VAC/ 24VDC	
Relay contact	2X SPDT	
Auxiliary supply	ON delay/ Interval	
Time ranges	0 - 9.99sec, 0 - 99.9sec, 0 - 999sec, 0 - 99.9min, 0 - 999min, 0 - 99.9hr	
Resolution	0.01sec	
Counting direction	Down	
Set point	1	
Time setting	Pushwheel	
Reset	Front, Remote, On power interruption	
Memory retention	No	
Supply voltage	90 to 270 VAC/ DC (50/ 60Hz) and 24 VDC	
Temperature	Operating: 0 to 50°C ; Storage: - 5 to 55°C	
Humidity (non - condensing)	95% RH	
Mounting	Panel mount	
Weight	325 gms	350 gms

Terminal connections


XT264-3



XT364-3

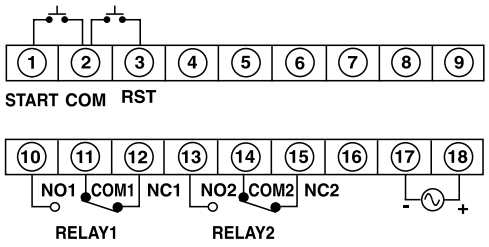


Dimensions (All are in mm)

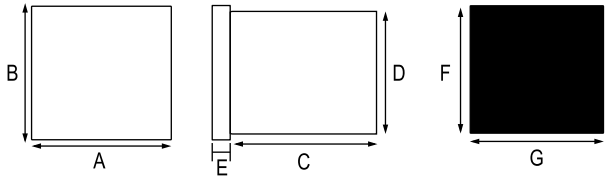

DIM	A	B	C	D	E	F	G
XT264-3	72	72	115	68	10	69	69
XT364-3	96	96	70	90	10	92	92

Timing diagrams

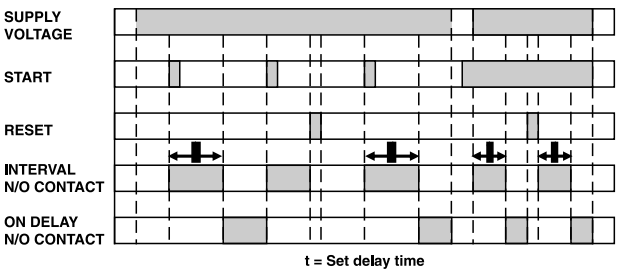

Ordering information

XT264-3	90 to 270 VAC/ DC	- - -
XT364-3	90 to 270 VAC/ DC	- - -