

Features:

- Plug in module
- Easy to connect & replace in Flexys GT35, Flexys rail, Flexys Panel TX4 & EXP-FLEX-2M
- Configured via selpro software
- Spring type pluggable terminals


Electrical specifications

No. of channels	4 channels
Output range	0-20mA
Digital resolution	0.0 to 100.0% = 0 to 20mA
Input impedance in signal range	≤800Ω
Accuracy	±0.25% of full scale
Non linearity	±0.25% of full scale
Conversion time	100ms
Over range value	10% of full scale

General specifications

Ambient operating temperature	0°C to 55°C
Humidity	95%
Ambient storage temperature	-20°C to 70° C
Weight	40 gms

Terminal diagram

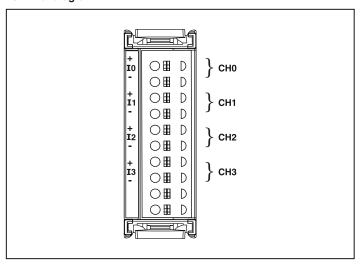

Ordering information

Product Code	Description	Certification
FL-SC-AO04-I -CE-RoHS	4 Channels analog output card - Current	C€ RoHS

ww.selec.com 1



Features:

- Plug in module
- Easy to connect & replace in Flexys GT35, Flexys rail, Flexys Panel TX4 & EXP FLEX 2M
- Configured via selpro software
- Spring type pluggable terminals

Electrical specifications

No. of channels 4 Channels
Output range 0-10V DC

Digital resolution 0.0 to 100.0% = 0 to 10 volt

Input Impedance in signal range ≥1kΩ

 $\begin{array}{ll} \mbox{Accuracy} & \pm 0.25\% \mbox{ of full scale} \\ \mbox{Non linearity} & \pm 0.25\% \mbox{ of full scale} \end{array}$

Conversion time 100ms


Short circuit protection Voltage output has short circuit protection but the long period of short circuit may cause internal

wire damage

General specifications

Ambient operating temperature 0°C to 55°C
Humidity 95%
Ambient storage temperature -20°C to 70°C
Weight 40gms

Terminal diagram

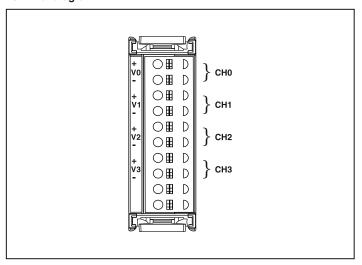

Ordering information

Product code	Description	Certification
FL-SC-AO04-V -CE-RoHS	4 Channel analog output card - Voltage	C€ RoHS

www.selec.com 1