



72 x 72mm

**Features :**

- True RMS measurement
- Analog style bar graph for voltage representation
- Selector switch for page selection
- CE & RoHS certified

Certifications :

**Display Specifications**

Display	7 segment LCD Display
Digits	3
Digit Height	0.56" (14.2mm)
Display range	0 – 516V
Resolution	1V

**Input Specifications**

Electrical Connection	3 Ø- 3 wire, 3 Ø- 4 wire
Input Type	AC
Input Current Range	50 to 480V
Continuous Max. Input Current	516V
Accuracy	±0.5% of F.S.
Frequency Range	50 - 60Hz

**Electrical specification**

Installation category	III
High Voltage Test	2kV AC, 50Hz
IP protection	IP51 Front Only
Sampling Rate	3 samples / second
Dielectric withstand Voltage	2kV AC between auxiliary supply & measuring input
Rated Impulse withstand Voltage	2kV (1.2/50µS)

**Auxiliary Supply Specifications**

Auxiliary Supply	AC: 240V AC ±20% , (50 / 60Hz)
Supply Frequency	50 / 60Hz
Input Burden	0.5 VA @ 5AAC
Power Consumption	5VA max


**Environmental Specifications**

Operating Temperature	-10°C to +55°C (14°F to 131°F)
Storage Temperature	-20°C to +75°C (-4°F to 167°F)
Humidity (non-condensing)	Upto 95% RH
Pollution degree	2
Altitude	Upto 2000 meters
Measurement Category	CAT III


**Mechanical Specifications**

Mounting	Panel mount
Bezel size	72 mm x 72 mm
Overall depth	50 mm
Weight	206 gms
Torque at terminals	0.68 N-m to 0.79 N-m
Wire Gauge at terminals	20 to 14 AWG;75°C
Mounting position	Vertical

**Dimensions**

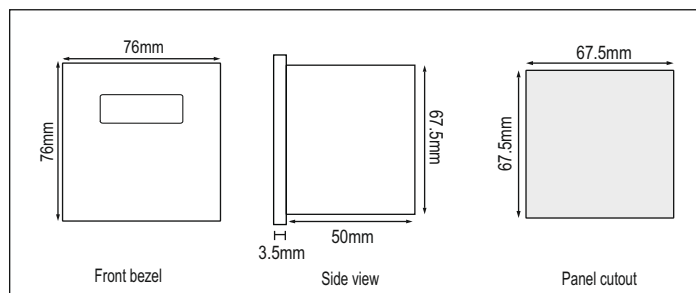

**Terminal Connections**

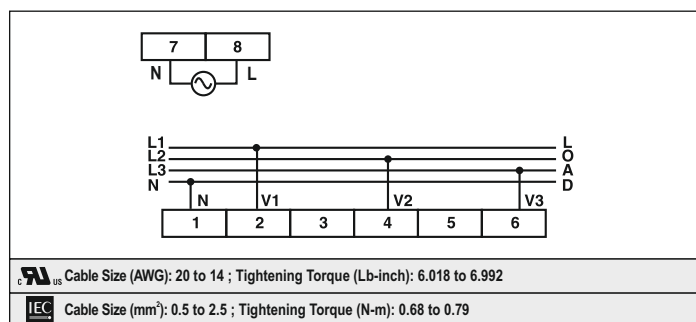

## Compliance

Applicable EMI / EMC Standards		
Product Standard : IEC 61326-1		
Category		Standards Compliance
ESD Immunity	IEC 61000-4-2	Level IV (Air discharge : 15kV), (Contact Discharge : -8kV)
Surge Immunity	IEC 61000-4-5	+/- 2kV common mode, (Line to ground) +/- 1kV differential mode, (Line to Line)
Radiated Susceptibility	IEC 61000-4-3	Level III, 80 to 1000MHz (10V/m) Level II, 1.4GHz to 2GHz (3V/m) Level I, 2GHz to 2.7GHz (1V/m)
Conducted Susceptibility	IEC 61000-4-6	Level II (3V/m)
Voltage Dips and Interruptions	IEC 61000-4-11	<b>Dips</b> : 0% residual voltage / 1 cycle (Criteria B), 40% residual voltage / 10 cycles 50Hz / 12 cycles 60Hz (Criteria C) 70% residual voltage / 25 cycles 50Hz / 30 cycles 60Hz (Criteria C) <b>Interruptions</b> : 0% residual voltage / 250 cycles 50Hz / 300 cycles 60Hz (Criteria C)
Conducted Emission	CISPR-11	
Radiated Emission	CISPR-11	
Electrical Fast Transient	IEC 61000-4-4	Level III (2kV)

## Ordering Information

Product Code	Supply Voltage	Certification
MV2307	240V AC	■
MV2307-230V-CE	240V AC	CE