| | |
|---|---|
| Supply voltage | 90 to 270V AC / DC (50 / 60Hz) |
| Power consumption | 5 VA max @ 230V AC |
| | |
| Temperature | Operating : 0°C to 50°C; Storage : -20°C to 75°C |
| Humidity (non - condensing) | 95% RH |
| | |
| Mounting | Panel |
| Weight | DTC224 - 164 gms ; DTC324 - 217 gms |

## Terminal connections

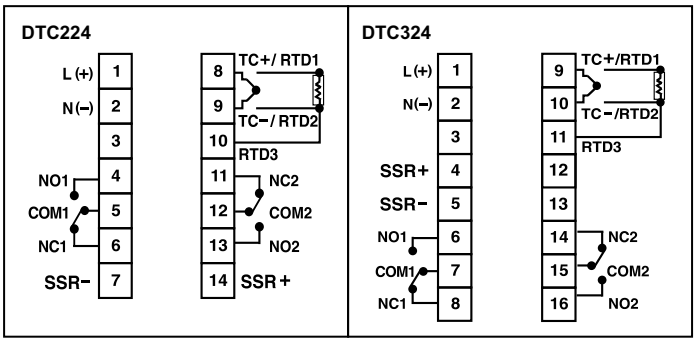


## Dimensions (All are in mm)

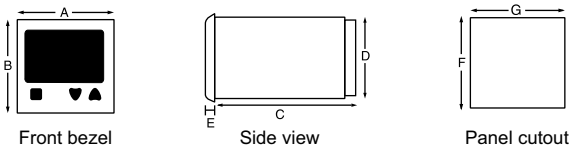


| MODELS / DIM | A | B | C | D | E | F | G |
|---|---|---|---|---|---|---|---|
| DTC224 | 76 | 76 | 44 | 67 | 4.5 | 69 | 69 |
| DTC324 | 99 | 99 | 39 | 90.5 | 3.5 | 92 | 92 |

## Ordering information

| | | | | | |
|---|---|---|---|---|---|
| **DTC224** | RELAY (5A) | SSR (12V DC) | RELAY (5A) | 90 to 270V AC / DC | - - - |
| **DTC324** | RELAY (5A) | SSR (12V DC) | RELAY (5A) | 90 to 270V AC / DC | - - - |