Features :

- 6 digits for time, 2 digits for step no.
- 30 ON - OFF steps per day
- Indications
  - -Auto manual
  - - Holiday
  - - Relay status
  - - Day of week
  - - Programming mode
- 10 years power reserve (Lithium battery)

Certification : CE

DIN 35mm

Display specifications

Display	Text LCD (Without backlight) 6 digits for time, 2 digits for step no.
Character height	5.07mm (HH : MM) and 3.39mm (SS)
Indications (Through symbols)	Auto manual, Relay status, Day of week, Programming mode

Output specifications

No. of output	2
Relay contact	1 C/O SPDT
Contact rating	16A @ 250VAC

Functional specifications

Operation period	1 week
Weekly program	Total 30 ON Steps and 30 OFF Steps
Minimum setting unit	1 second
Holiday settings	16 dates
Clock	12 - hr (AM / PM) and 24 - hr selection
Relay operating mode	Auto / Permanent override ON / Permanent override OFF
RTC accuracy	15 mins a year @ 25°C

Auxiliary supply specifications

Supply voltage	230VAC ±10% (50 / 60 Hz)
Power consumption	Approx. 9 watts at 252 V AC

Environmental specifications

Temperature	Operating : 0 to 50° C Storage : -20 to 70°C
Humidity (non - condensing)	Upto 95% RH

Mechanical specifications

Mounting	DIN rail mount
Weight	105 g

Dimensions

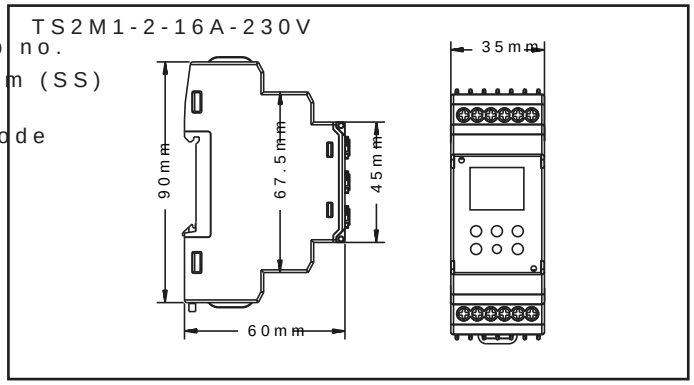
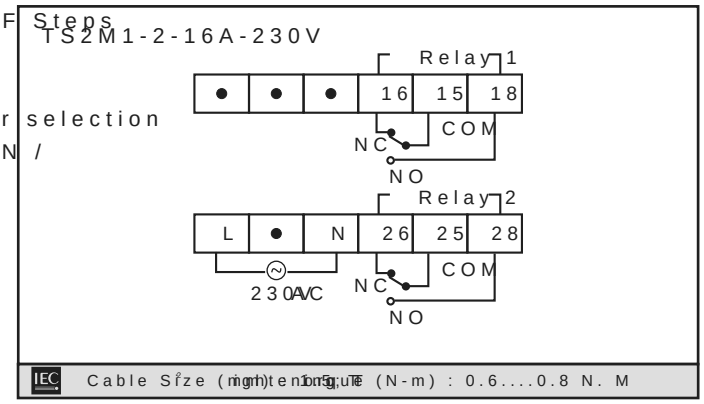
Terminal connections