



Features :


- ▶ 6 Digits for time display, 2 Digits for step no.
- ▶ 50 ON - OFF Steps Per Day
- ▶ Indications
 - Auto manual
 - Holiday
 - Relay status
 - Day of week
 - Programming mode
- ▶ 10 Years power reserve (Lithium battery)

Certifications : CE


Technical specifications

Display specifications	
Display	Text LCD (Without backlight) 6 Digits for time display, 2 Digits for step no.
Character height	5.07mm (HH : MM) and 3.39mm (SS)
Indications (Through symbol)	Auto manual, Holiday, Relay status, Day of week, Programming mode
Output specifications	
No. of output	1
Relay contact	1 NO & Neutral
Contact rating	20A @ 250V AC
Functional specifications	
Operation period	RTC accuracy
Program	1 week Total 50 ON steps and 50 OFF steps 2 programs x 25 steps 3 Programs x 16 steps 4 Programs x 12 steps 5 Programs x 10 steps 6 Programs x 08 steps 7 Programs x 07 steps 8 Programs x 06 steps
Minimum setting unit	1 second
Holiday settings	16 dates
Clock	12 - hr (AM / PM) and 24 - hr selection
Relay operating mode	Auto / Permanent override ON / Permanent override OFF
RTC accuracy	15 mins a year@25°C
Auxiliary supply specifications	
Supply voltage	230V AC $\pm 10\%$, (50 / 60 Hz)
Power consumption	Approx. 9 watts at 252 VAC
Environmental specifications	
Temperature	Operating : 0 to 50° C Storage : -20 to 70°C
Humidity (non - condensing)	Upto 95% RH
Mechanical specifications	
Mounting	Wall mount
Weight	100gms

Terminal connections

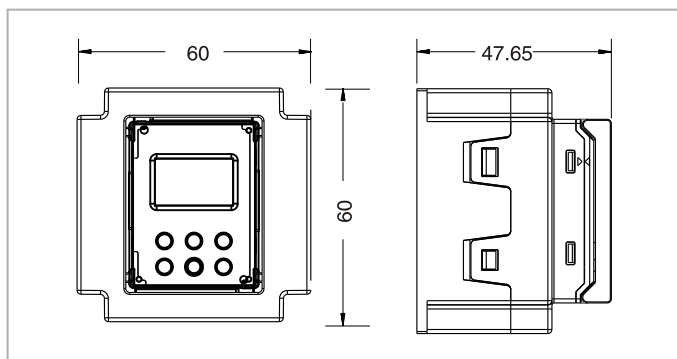

Timing diagram

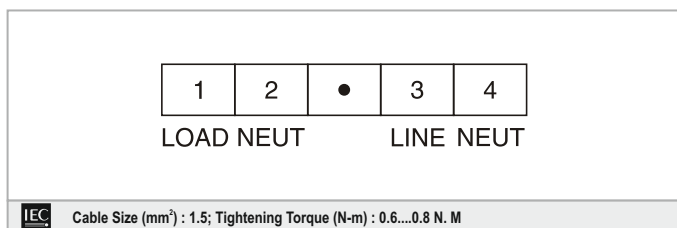

Compliance

Applicable EMI / EMC Standards		
Product standard : IEC 60947-2		
Category	Reference standards	Testing level
Electrostatic discharge	IEC 61000-4-2	Level-3
Electrical fast transient / Burst	IEC 61000-4-4	Level-3
Electromagnetic field	IEC 61000-4-3	Level-3
Surge	IEC 61000-4-5	Level-3
Conducted RF	IEC 61000-4-6	Level-2
Rated power frequency	IEC 61000-4-8	Level-4
Voltage dip / Short interruptions	IEC 61000-4-11	Level-3
Conducted emissions	CISPR-11	Class-B
Radiated emission	CISPR-22	Class-A
Emission & Immunity	IEC 61326-1	
Safety	IEC 61010-1	

Ordering information

Product code	Supply voltage	Certification
TS1W1-1-20A-230V-CE	230V AC	CE