



96 x 96 mm

Features :

- 1Ø and 3Ø current measurement
- PT primary programmable up to 999kV
- K LED kilo indication
- CE & RoHS certified

Certifications : 


Technical specifications

Display	7 Segment LED display
Digit	4
Display height	0.56" (14.2 mm)
Display update time	1 Sec
Display range	0-999kV
Resolution	Auto resolution
Electrical connection	3Ø-4W, 3Ø-3W, 1Ø-2W
Input type	AC
Rated input voltage	11 to 300V (L-N), 19 to 516V (L-L)
Over range indication	"Or" for input > 516V (L-L), 300V (L-N)
Continuous max. input voltage	120% of rated voltage
Accuracy	±0.5% of F.S.
Frequency range	50 - 60Hz
Input impedance	1MΩ (± 5%)
Installation category	III
High voltage test	120 % of rated voltage
IP Protection	IP51 (Front), IP20 (Rear)
Sampling rate	3 Samples / Second
Dielectric withstand voltage	2kV AC Between auxiliary supply & measuring input
Rated impulse withstand voltage	2kV (1.2/50μS)
Auxiliary supply	230V AC ±20%, (50/60Hz)
Supply frequency	50/60 Hz
Input burden	0.5VA@5A AC
Power consumption	5VA max
Network selection	3Ø-4W, 3Ø-3W, 1Ø-2W
CT Primary setting	100-999kV (Programmable for any value)
CT Secondary setting	100V-500V (Programmable for any value)

Operating temperature	-10°C to +55°C (14°F to 131°F)
Storage temperature	-20°C to +75°C (-4°F to 167°F)
Humidity (Non - condensing)	Up to 85%
Pollution degree	2
Altitude	Upto 2000 meters
Measurement category	CAT III

Mounting	Panel mount
Bezel size	96 x 96 mm
Overall depth	38 mm
Weight	155 gms
Torque at terminals	0.68 N-m to 0.79 N-m
Wire Gauge at terminals	20 to 14 AWG; 75°C
Mounting position	Vertical


Terminal connections

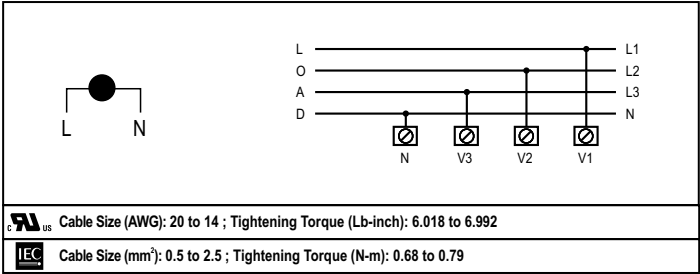

Standards compliance

Category	Standards	Compliance
ESD Immunity	IEC 61000 - 4 - 2	Level IV (Air discharge : 15kV), (Contact discharge : -8kV)
Surge immunity	IEC 61000 - 4 - 5	+ / - 2kV Common mode, (Line to ground) + /- 1kV differential mode, (Line to line)
Radiated susceptibility	IEC 61000 - 4 - 3	Level III, 80 to 1000MHz (10V / m) Level II, 1.4GHz to 2GHz (3V / m) Level I, 2GHz to 2.7GHz (1V / m)
Conducted susceptibility	IEC 61000 - 4 - 6	Level II (3V / m)
Voltage dips and interruptions	IEC 61000 - 4 - 11	Dips : 0% Residual voltage / 1 Cycle (Criteria B), 40% Residual voltage / 10 Cycles 50Hz / 12 Cycles 60Hz (Criteria C) 70% Residual voltage / 25 Cycles 50Hz / 30 Cycles 60Hz (Criteria C) Interruptions : 0% Residual voltage / 250 Cycles 50Hz / 300 Cycles 60Hz(Criteria C)
Conducted emission	CISPR - 11	
Radiated emission	CISPR - 11	
Electrical fast transient	IEC 61000 - 4 - 4	Level III (2kV)

Dimensions (All are in mm)

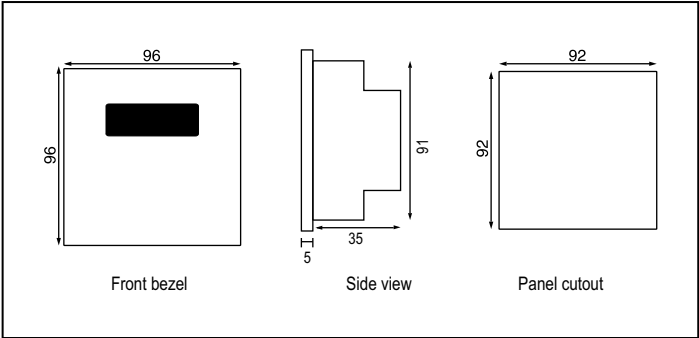

Ordering information

MV334-230V	230V AC	---
MA334-230V-CE	230V AC	CE