


Environmental specifications

Operating temperature	-10°C to +55°C (14°F to 131°F)
Storage temperature	-20°C to +75°C (-4°F to 167°F)
Humidity (Non - condensing)	Up to 85%
Pollution degree	2
Altitude	Upto 2000 meters
Measurement category	CAT III


Mechanical specifications

Mounting	Panel mount
Bezel size	96 x 96 mm
Overall depth	38 mm
Weight	155 gms
Torque at terminals	0.68 N-m to 0.79 N-m
Wire Gauge at terminals	20 to 14 AWG; 75°C
Mounting position	Vertical

Terminal connections

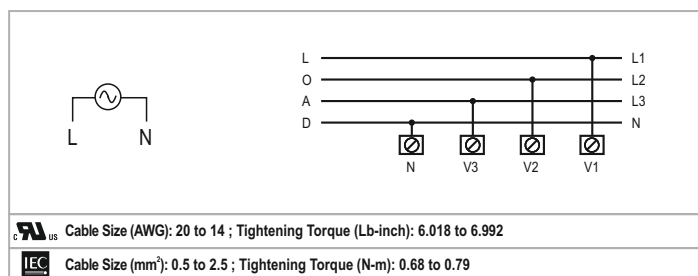

Dimensions (All are in mm)

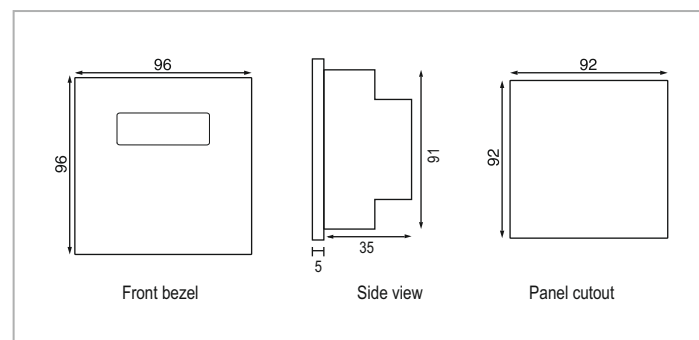

Standards compliance

Applicable EMI / EMC Standards		
Product standard : IEC 61326 - 1		
Category	Standards	Compliance
ESD Immunity	IEC 61000 - 4 - 2	Level IV (Air discharge : 15kV), (Contact discharge : -8kV)
Surge immunity	IEC 61000 - 4 - 5	+ / - 2kV Common mode, (Line to ground) + / - 1kV differential mode, (Line to line)
Radiated susceptibility	IEC 61000 - 4 - 3	Level III, 80 to 1000MHz (10V / m) Level II, 1.4GHz to 2GHz (3V / m) Level I, 2GHz to 2.7GHz (1V / m)
Conducted susceptibility	IEC 61000 - 4 - 6	Level II (3V / m)
Voltage dips and interruptions	IEC 61000 - 4 - 11	Dips : 0% Residual voltage / 1 Cycle (Criteria B), 40% Residual voltage / 10 Cycles 50Hz / 12 Cycles 60Hz (Criteria C) 70% Residual voltage / 25 Cycles 50Hz / 30 Cycles 60Hz (Criteria C) Interruptions : 0% Residual voltage / 250 Cycles 50Hz / 300 Cycles 60Hz(Criteria C)
Conducted emission	CISPR - 11	
Radiated emission	CISPR - 11	
Electrical fast transient	IEC 61000 - 4 - 4	Level III (2kV)

Ordering information

Product code	Supply voltage	Certification
MV334-230V	230V AC	---
MA334-230V-CE	230V AC	CE