

Input Sensor Ranges (for 1°C resolution)

J	-200 to 750°C
K	-200 to 1350°C
T	-200 to 400°C
R	0 to 1750°C
S	0 to 1750°C

C	0 to 2300°C
Platinel II	0 to 1390°C
PT1000	-200 to 850°C
E	-200 to 750°C
B	-149 to 1820°C

N	-200 to 1300°C
L	-200 to 600°C
U	-200 to 900°C
W	0 to 2300°C
PT100	-200 to 850°C

Signal inputs :

Linear mV	-5 to 90mV
Voltage	0 to 10VDC
Current	0 to 20mV

Overall Dimensions (All dimension in mm)

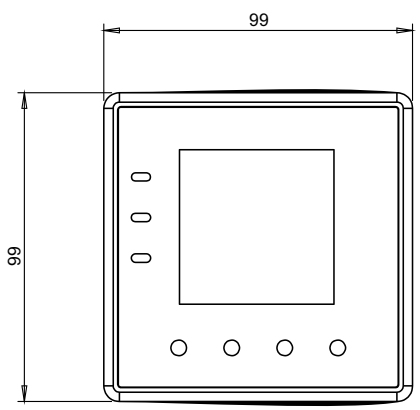

FRONT VIEW

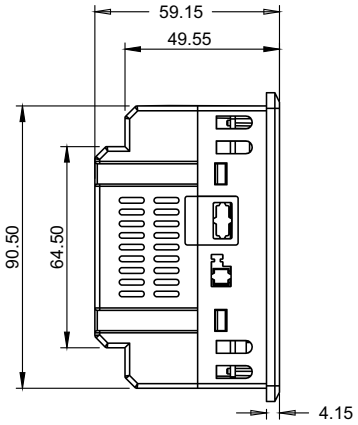

SIDE VIEW

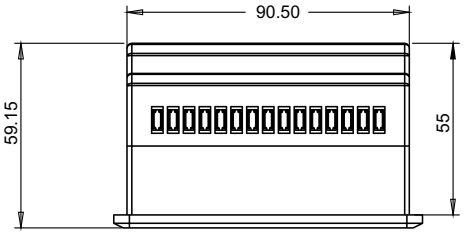

TOP VIEW

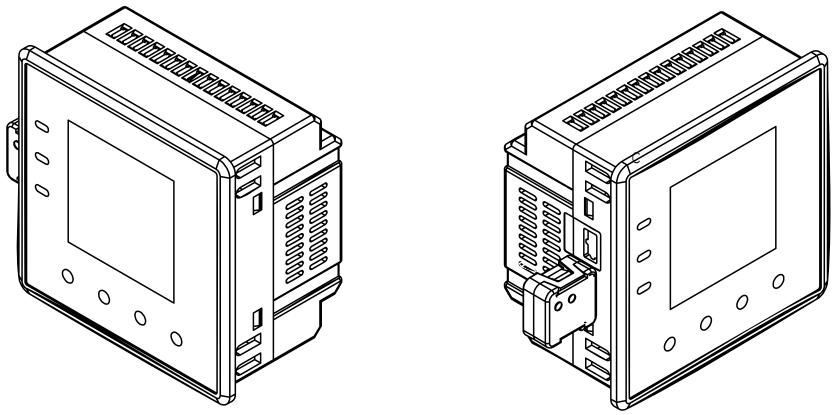

FULL PRODUCT SCHEMATIC

Terminal Connection

PIC352-11-U-C-1

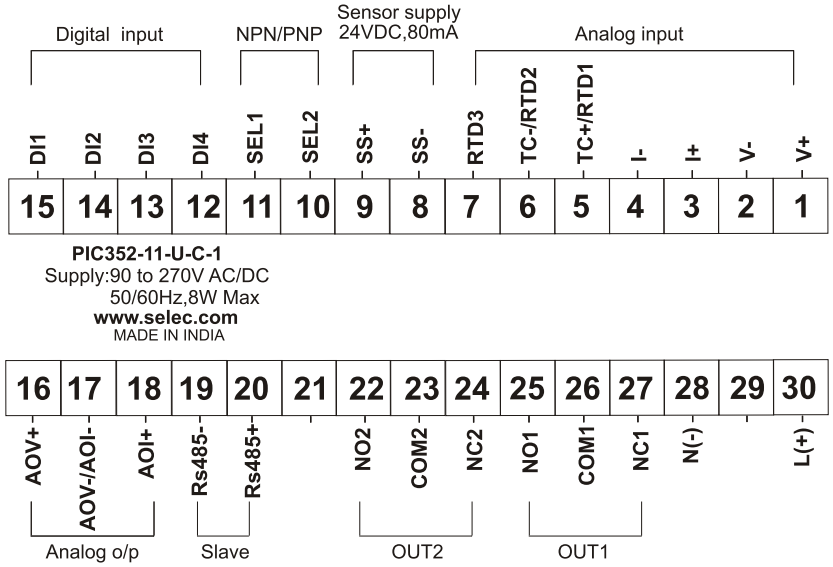

PIC352-11-U-0-1

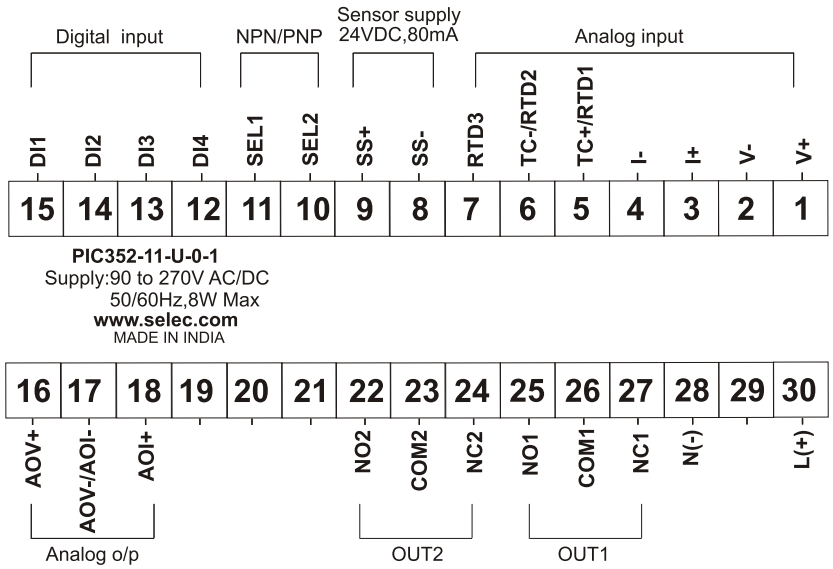

IDM Level

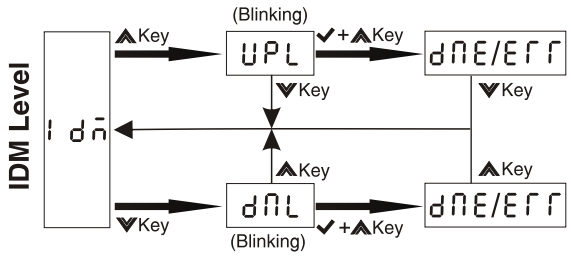

Display	Parameter Description
Idn	Independent Downloader Module
UPL	Upload from product to IDM
dNL	Download from IDm to product
dNE	Operation successful
ErR	Operation unsuccessful

Alarm Display with Active Backlight

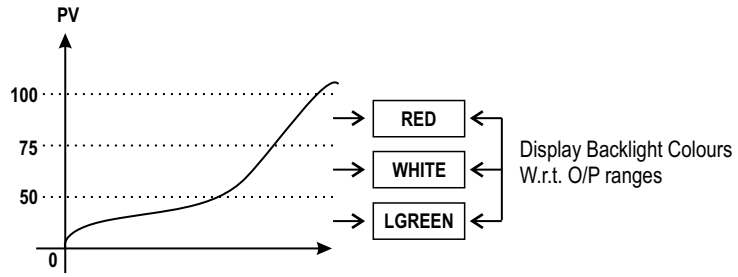

Ordering Information

PIC352-11-U-C-1	Universal	24V DC	90 to 270V AC / DC	RS485 MODBUS	CE RoHS compliant
PIC352-11-U-0-1	Universal	24V DC	90 to 270V AC / DC	- - -	CE RoHS compliant