

Auxiliary supply specifications

	, 50 / 60 Hz, (±5%)
Burden	< 6 VA at 277V L-N
Frequency	50/60 Hz nominal
Ride-through time	100 ms typical at 120V AC and maximum burden 100 ms typical at 277V AC and maximum burden


Input specification

--


Environmental specifications

--

Dimensions (All are in mm)

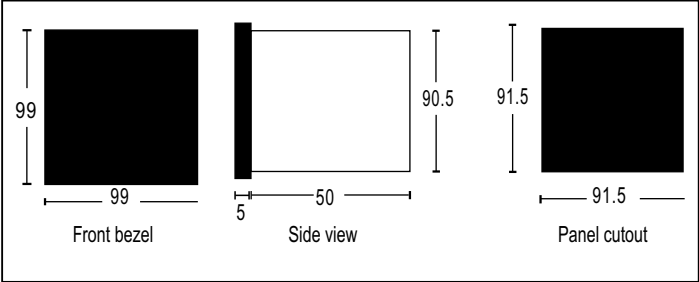

Terminal connection

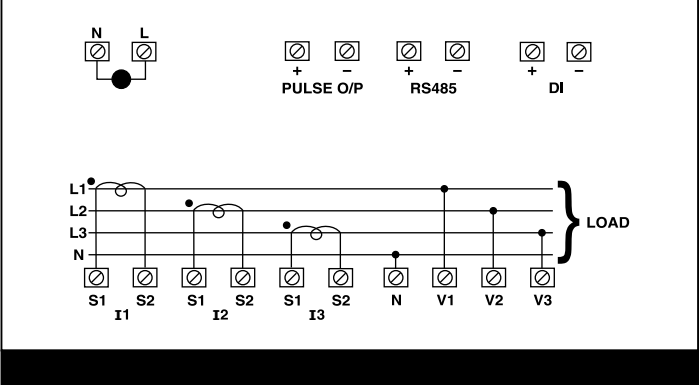

Compliance

Category	Standards compliance
Electrostatic discharge	IEC 61000 - 4 - 2
Immunity to electromagnetic RF fields	IEC 61000 - 4 - 3
Conducted immunity	IEC 61000 - 4 - 6
Immunity to magnetic fields	IEC 61000 - 4 - 8
Immunity to voltage dips and interruptions	IEC 61000 - 4 - 11
Fast transient	IEC 61000 - 4 - 4
Immunity to surge waves	IEC 61000 - 4 - 5
Conducted and radiated emissions	CISPR-11
Safety and Standards	
IEC61010-1 Edition 3.0 CAT III, Protection class II	
IEC 61326 - 1	
CAT III up to 480 V L-L	
CAT III up to 300 V L-N	
As per IEC/UL 61010-1 Ed-3	

Ordering information

, 50 / 60 Hz
CE