



Features :


- ▶ Real time, dynamic step-less compensation
- ▶ Instant response time of 50 μ sec & full response within 1 cycle
- ▶ Capacitive (Leading) & Inductive (Lagging) reactive power mitigation
- ▶ Harmonic correction up to 51th order
- ▶ RS485, Optional Wi-Fi / Ethernet modular arrangement-parallel operation up to 8 module
- ▶ Can be installed with conventional capacitor banks

Technical specifications


Main	
Product name	AHF
Product or component type	Active harmonic filter
System parameter	
Network configuration	3P-3W / 3P-4W
Line - Line voltage	308V to 460V
Operating voltage range (P-N)	178V to 265V
Network frequency	50/60 HZ (± 2.5 Hz)
RMS output current rating	100A
Current transformer	Settable through HMI up to 30000/5A
CT Location	Grid side / Load side
Reactive power compensation and load balancing	As per priority & based on site (Q+H+B, H+Q+B)
Inverter topology	Three level neutral point clamped
Reactive power rating	72kVAR at 415V
Incomer protection	External short circuit protection device mandatory
Performance	
Parallel operations	Upto 8 units
Efficiency	$\geq 97\%$
Losses	$< 3\%$
Response time	$< 50\mu$ sec and full response within 1 cycle
Overall response time	< 5 ms
Target power factor	Adjustable from -1 to +1
Noise Level	Audible noise < 70 dB
DSP	C2000 family DSP
Harmonic mitigation	Upto 51 th order for max current rating of 100A
Operating modes	Harmonic cancellation, Load Balancing, Power factor correction
Protection function	Over-voltage protection, Under-voltage protection, IGBT desaturation protection, over temperature protection desaturation, over-current protection
Protection type	Built In semi conductor fuse
Cooling	Forced air cooling, 188L / Sec
Communications and monitoring capabilities	
Local monitoring	4.3" HMI Display
Digital Inputs	1 DI - Programmable for DG Input
Digital outputs	2 DO - Programmable for alarms
Communication ports	RS485 (default)
Communication protocols	MODBUS-RTU (default)
Software updates	Through RS485 port using customised utility

Mechanical properties	
Event logging	Up to 100 logs
Mounting type	Wall / Rack mount
Dimensions (W × D × H) mm	503*205*795
MCCB	200A
Colour	RAL9004
Environment conditions	
Altitude	<2000m
Operating temperature	-10 °C to 50 °C
Relative humidity	95% RH; Non condensing
Protection class	IP20
Certification and standard	EN 50178:1997 / IEC 50178:1997
Certification	EN 61000_6_2(2005) / EN55011, GROUP1, CLASS A IEC 61000_6_2(1999) / CISPR11, GROUP1, CLASS A
AHF Series performance requirement	EN 50091-3 / IEC 62040-3 / AS 62040-3 (VFI SS 111)


Mechanical dimensions

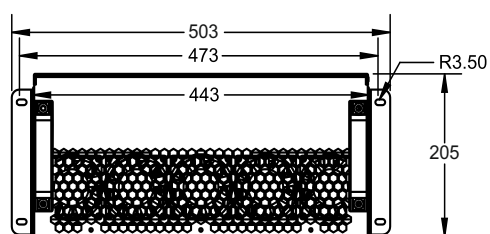


FRONT VIEW

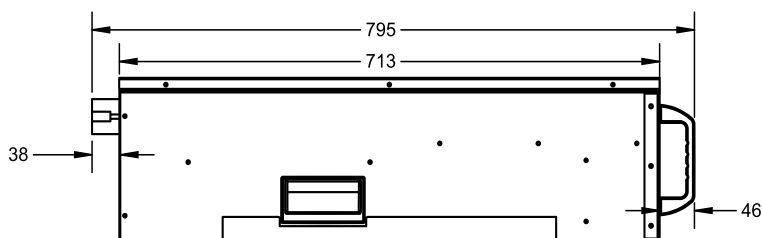

SIDE VIEW

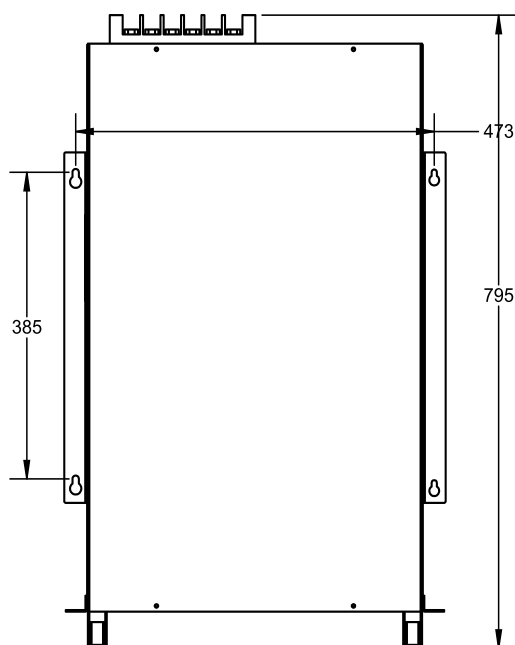


TOP VIEW

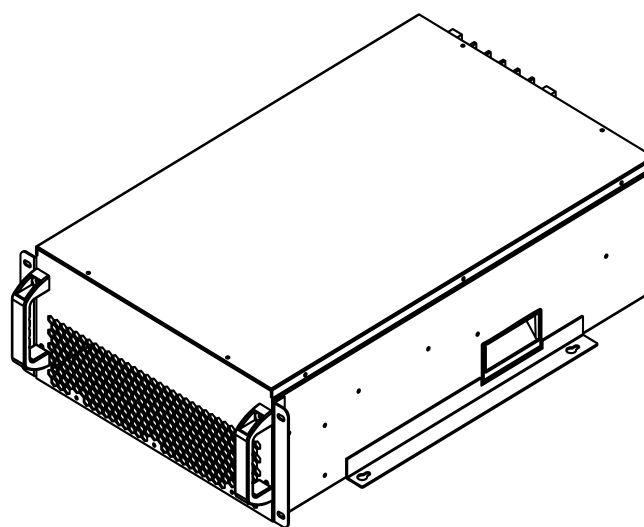


ISOMETRIC VIEW

Terminal diagram

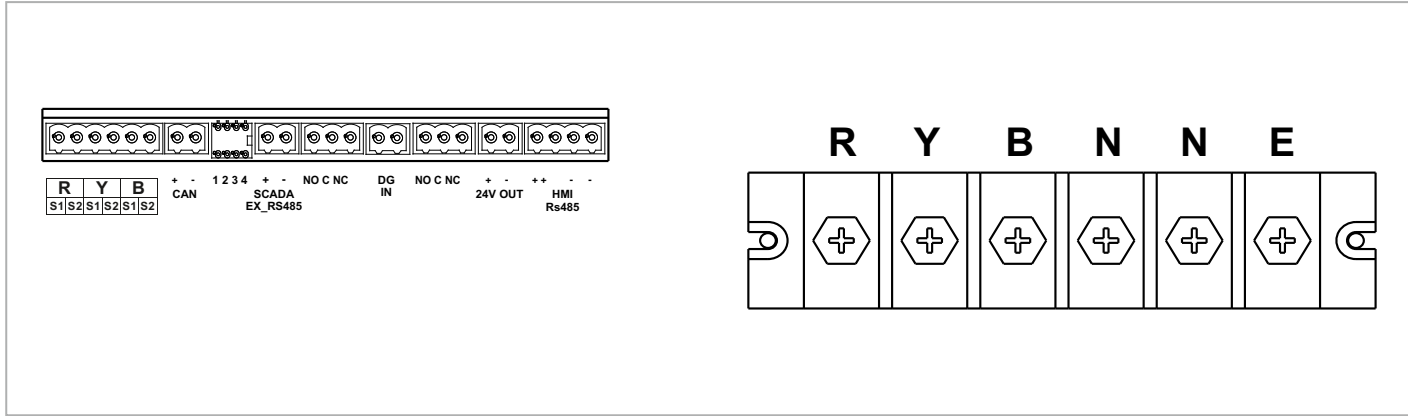

Terminal connection

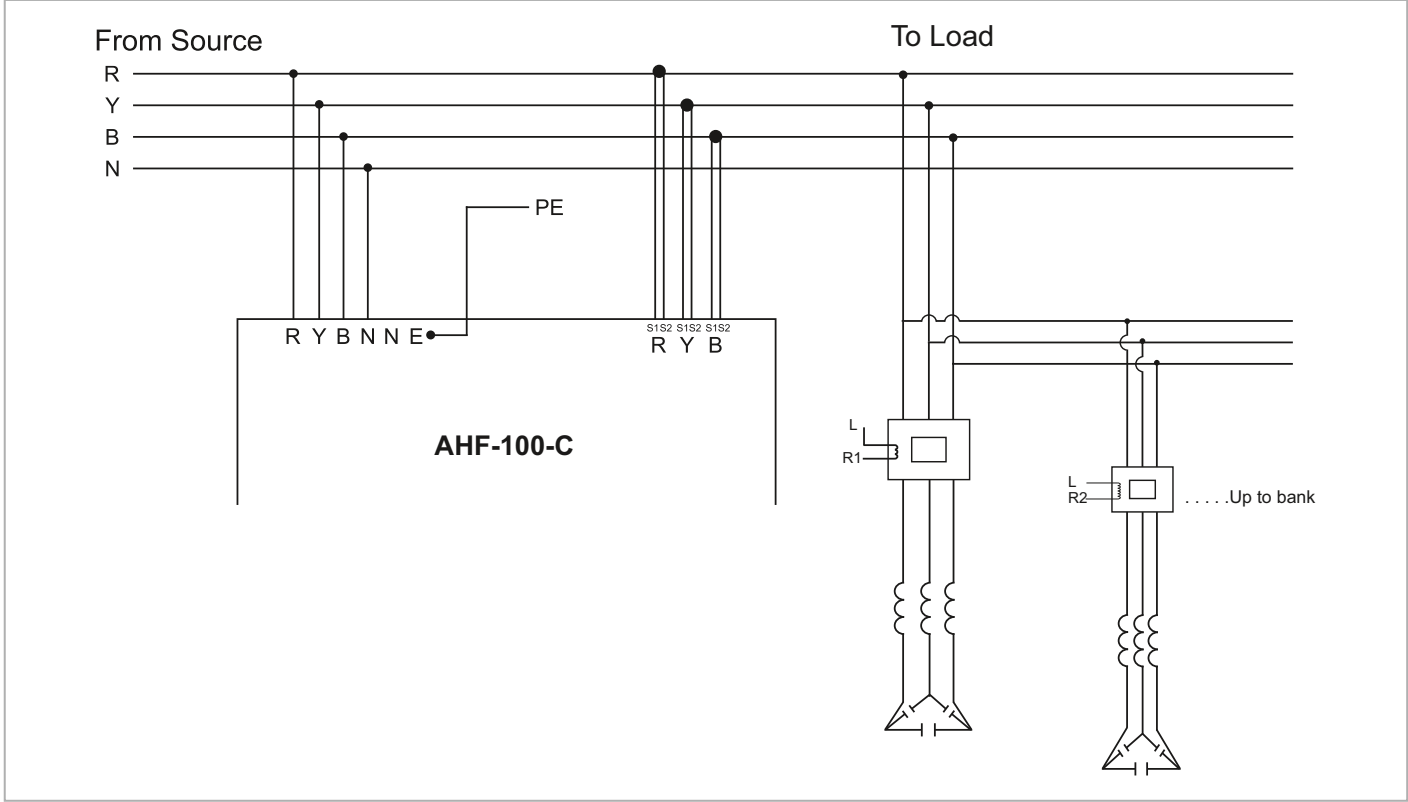

Ordering information

Product code	Description
AHF-100-RCK-4P-04-C	Active harmonic filter 100A, C, Rack mounted, 3P-4W with 4.3 inch HMI
AHF-100-WLL-4P-04-C	Active harmonic filter 100A, C, Wall mounted, 3P-4W with 4.3 inch HMI
AHF-100-WLL-4P-XX-C	Active harmonic filter 100A, C, Wall mounted, 3P-4W without display

Note : For XX Model separate common controller is mandatory