



Terminal Connections

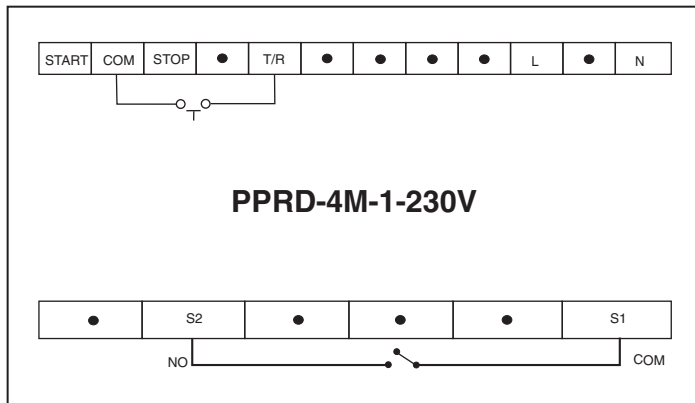

Connection Diagram

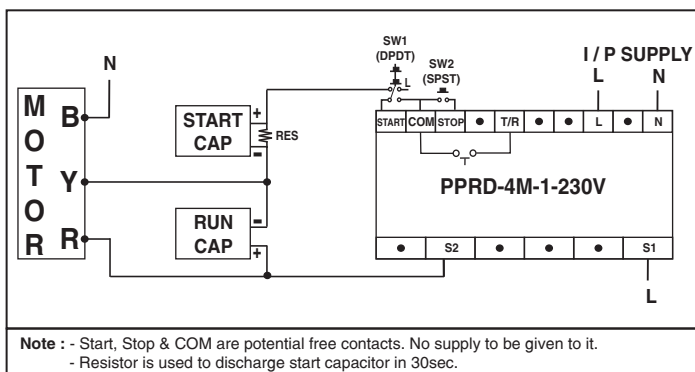

Ordering Information

Product code	Supply voltage	Certification
PPRD-4M-1-230V	180V - 300V AC (L - N)	---

Recommended resistor value as per different motor rating

Start Capacitor Value	Resistor Value
Upto 200uF/300VAC	100kOhm/2W

(Minimum 30sec delay required between two consecutive starts.)