Digital Voltmeter

MV15

48 x 96 mm

Features :

- Class 0.5 accuracy
- True RMS voltage measurement
- CE & RoHS Certified

Certifications : CE cULus LISTED

Technical specifications

Display specifications	
Display	7 Segment LED
Digits	3
Digit height	0.56" (14.2mm)
Display range	20 to 600V
Resolution	1V
Input specifications	
Electrical connection	1Ø-2W
Input type	AC/DC
Input voltage range	50-600V
Continuous max. input rating	600V
Accuracy	±0.5% of F.S.
Over range indication	"Or" for input> 600V
Frequency range	50-60Hz
Electrical specification	
Installation category	III
High voltage test	2kV AC, 50Hz
IP Protection	IP51 Front only
Sampling rate	3 Samples/Second
Dielectric withstand voltage	2kV AC Between auxiliary supply & measuring input
Rated impulse withstand voltage	3.5kV (1.2/50µS)
Supply specifications	
Auxiliary supply	AC: 240V AC ±20%, (50/60Hz), 110V AC ±20%, (60Hz)
Supply frequency	50/60Hz
Input burden	0.5VA@5A AC
Power consumption	5VA Max@240V AC
Environment specifications	
Operating temperature	-10°C to +55°C (14°F to 131°F)
Storage temperature	-20°C to +75°C (-4°F to 167°F)
Humidity (Non - condensing)	Up to 95% RH
Pollution degree	2
Mechanical specifications	
Mounting	Panel mount
Bezel size	48mm x 96mm
Mounting	29.3mm
Installation category	80gm

Terminal connections

MV15

AC Models

MV15

DC Models

Dimensions (All are in mm)

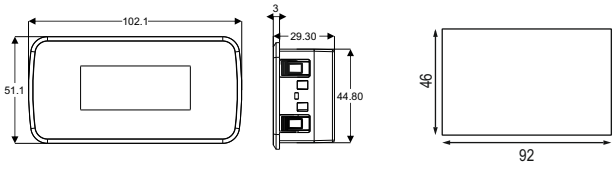

Front bezel | Side view | Panel cutout

Standards compliance

Applicable EMI / EMC Standards		
Product standard : IEC 61326 - 1		
Category	**Standards**	**Compliance**
ESD Immunity	IEC 61000 - 4- 2	Level IV (Air discharge : 8kV), (Contact discharge : 4kV)
Surge immunity	IEC 61000 - 4 - 5	+ / - 2kV Common mode, (Line to ground)
Radiated susceptibility	IEC 61000 - 4 - 3	Level III, 80 to 1000MHz (10V / m) Level II, 1.4GHz to 2GHz (3V / m) Level I, 2GHz to 2.7GHz (1V / m)
Conducted susceptibility	IEC 61000 - 4 - 6	Level II (3V / m)
Voltage dips and interruptions	IEC 61000 - 4 - 11	**Dips :** 0% Residual voltage / 1 Cycle (Criteria B), 40% Residual voltage / 10 Cycles 50Hz / 12 Cycles 60Hz (Criteria C), 70% Residual voltage / 25 Cycles 50Hz / 30 Cycles 60Hz (Criteria C) **Interruptions :** 0% Residual voltage / 250 Cycles 50Hz / 300 Cycles 60Hz(Criteria C)
Conducted emission	CISPR - 11	
Radiated emission	CISPR - 11	
Electrical fast transient	IEC 61000 - 4 - 4	Level III (2kV)

Ordering information

Product code	Supply voltage	Certification
MV15	240V AC, ±20%	- - -
MV15-CE	240V AC, ±20%	CE
MV15-110V-CU	110V AC, ±20%	CE cULus LISTED
MV15-DC-200V-110V-CU	110V AC, ±20%	CE cULus LISTED