
selec

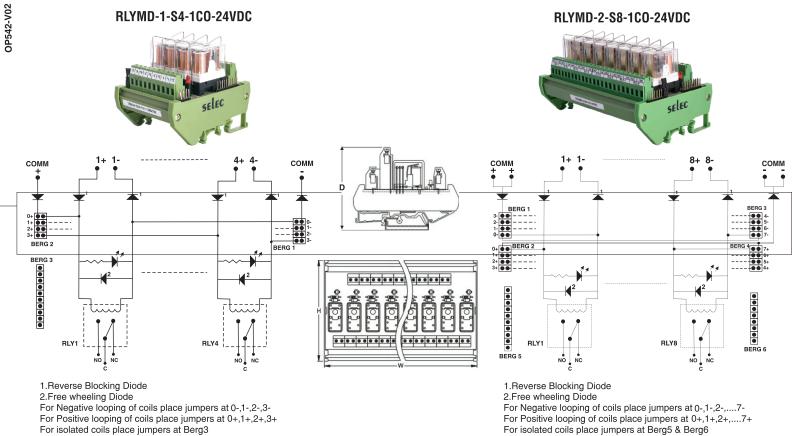

OП	ГОІ		$\mathbf{c}_{\mathbf{\Lambda}}$	IUИ
	136	ш	1 - 7 A A I	\mathbf{H}

	1					
FEATURES	LED & Free wheeling diode across coil Jumpers for Coil Looping					
	Reverse Polarity Protection					
CONTACTS	1C/O					
NO. OF CHANNELS	4, 8					
RELAY	NOMINAL COIL VOLTAGE	24V DC				
	MUST OPERATE VOLTAGE	18V DC				
	MAX COIL VOLTAGE	33V DC				
	COIL CURRENT PER CHANNEL	25 mA				
	OPERATE (SET) TIME	15 ms max				
	RELEASE(RESET) TIME	5 ms max				
	ENDURANCE	Mechanical: 10000000 ops				
	ENDORANCE	Electrical: 100000 ops				
DIELECTRIC STRENGTH	Coil to contact : 5000VAC for 1 minute Open Contacts : 1000VAC for 1 minute					
RELAY CONTACT RATING	10A@277VAC / 30VDC					
OPERATING AMBIENT	-40 To 70°C					
HUMIDITY	98% RH, 40°C					
TERMINATIONS	COIL TERMINATION	Screw type, for 2.5 mm sq. wire				
	CONTACT TERMINATION	Screw type, for 2.5 mm sq. wire				
MOUNTING	35 mm DIN rail					
	4CH	8CH				
ORDERING INFORMATION	RLYMD-1-S4-1CO-24VDC	RLYMD-2-S8-1CO-24VDC				
DIMENSIONS	69(W) x 87(H) x 78(D)(In mm)	138(W) x 87(H) x 78(D)(In mm)				
WEIGHT	210 grams	400 grams	1			