





SETTING THE TS2M1-1-16A-230V/TS1W1-1-20A-230V PARAMETER

Note: To change parameters value use "▷ / ◁ / ▽" : To set value use "ENT" : To come out of programming use "ESC" (NOTE 1, 3 & 5)

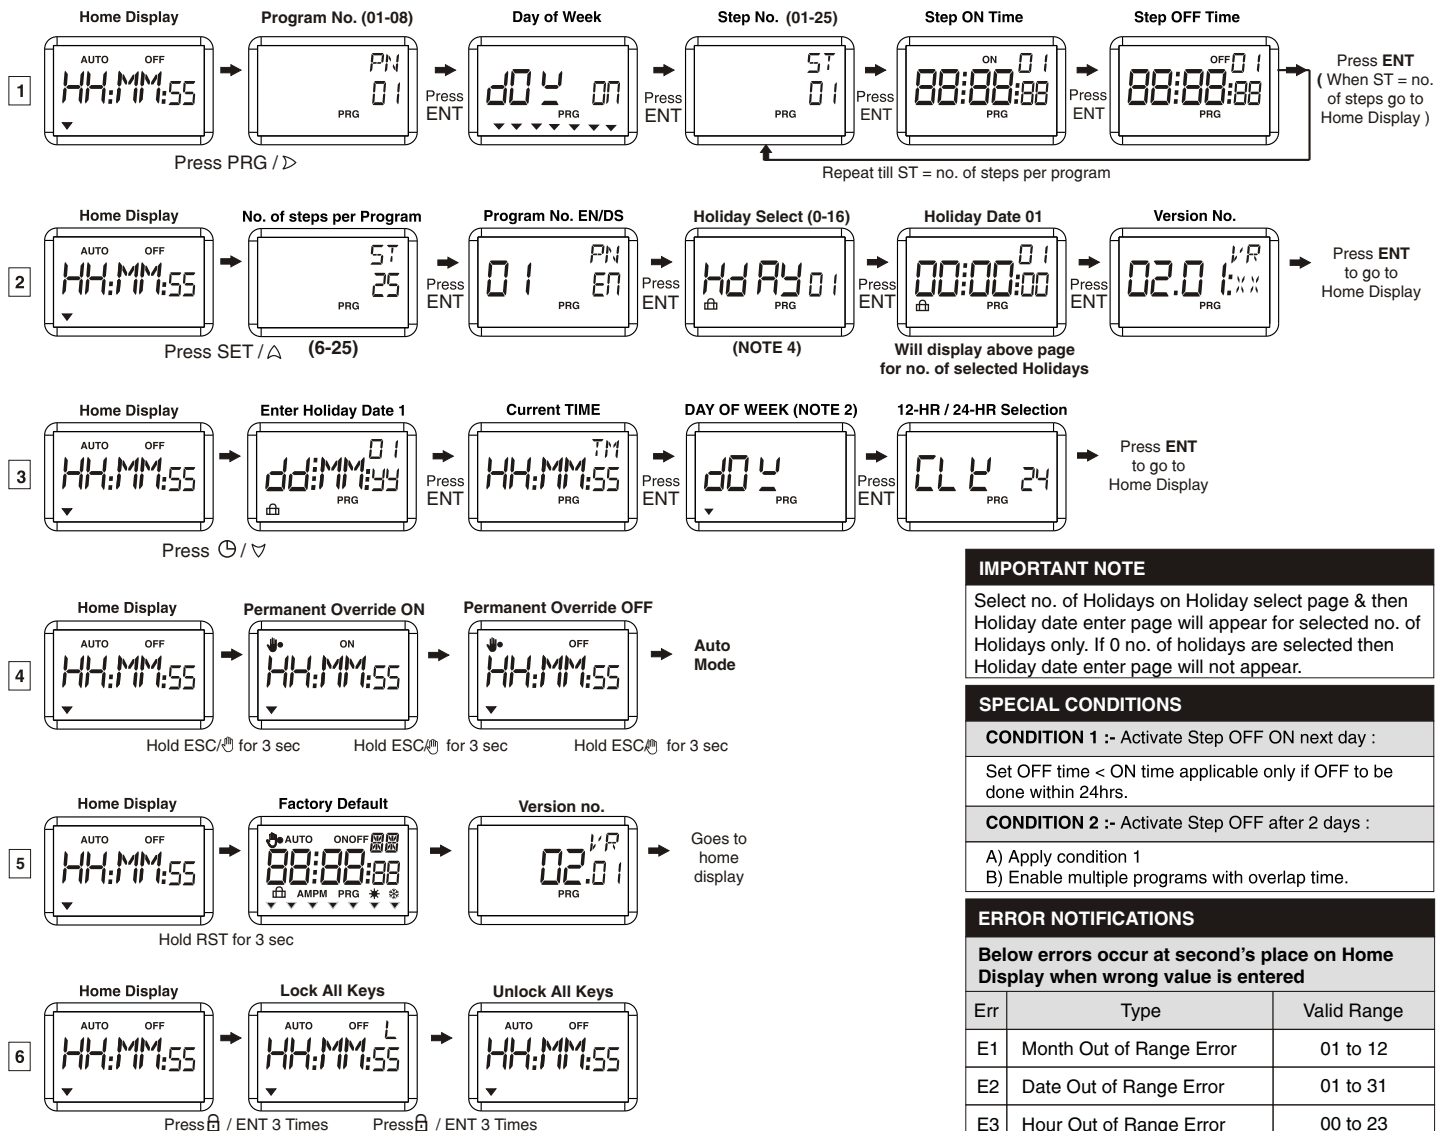

FRONT PANEL VIEW



KEY OPERATIONS

To Enter Programming	Press key
Set Control programs and Steps	PRG / ▷
Set Clock – Current Date & Time	⌚ / ▽
Set System Settings	SET / ◁
Factory Default	RST
To Exit programming	
Run Mode	Press & hold key for 3 secs
Mode Select- switch mode between a) Auto b) Permanent Override ON c) Permanent Override OFF	⏏ / ESC
To Modify Parameter in Programming (PRG) Mode	Press key
NOTE 1 : To modify parametric values.	◁ / ▷ / ◁ / ▽
NOTE 2 : To Modify Day of Week.	◁ / ▷ - Select Day of Week. ◁ / ▽ - Toggle On / Off.
NOTE 3 : To confirm selection / programming.	ENT Key
NOTE 4 : To select Holiday dates	◁ / ▽ - Select no. of holidays Press ENT to go to Holiday date select (Note 1 to edit)
NOTE 5 : Program Out	ESC Key or automatic 60sec program out on key inactivity.

IMPORTANT NOTE

Select no. of Holidays on Holiday select page & then Holiday date enter page will appear for selected no. of Holidays only. If 0 no. of holidays are selected then Holiday date enter page will not appear.

SPECIAL CONDITIONS

CONDITION 1 :- Activate Step OFF ON next day :

Set OFF time < ON time applicable only if OFF to be done within 24hrs.

CONDITION 2 :- Activate Step OFF after 2 days :

- A) Apply condition 1
B) Enable multiple programs with overlap time.

ERROR NOTIFICATIONS

Below errors occur at second's place on Home Display when wrong value is entered

Err	Type	Valid Range
E1	Month Out of Range Error	01 to 12
E2	Date Out of Range Error	01 to 31
E3	Hour Out of Range Error	00 to 23
E4	Step Hour Out of Range Error	00 to 23

(Specifications are subject to change, since development is a continuous process.)

Selec Controls Pvt. Ltd., India

Factory Address : EL-27/1, Electronic Zone, TTC Industrial Area, MIDC, Mahape, Navi Mumbai - 400 710, INDIA.

Tel. No. : +91-22-41 418 468/452 | Fax No. : +91-22-28471733 | Toll free: 1800 227 353 (BSNL/MTNL Subscribers only)

Website : www.selec.com | Email : sales@selec.com