
Auxiliary supply	AC: 240V AC ±20%, (50/60Hz), 110V AC ±20%, (60Hz)		
Supply frequency	50/60Hz		
Input burden	0.5VA@5A AC		
Power consumption	5VA max		
Mounting	Panel mounting		
Bezel size	72mm x 72mm		
Overall depth	50mm		
Weight	163gm		
Torque at terminals	0.68 N-m to 0.79 N-m		
Torque at terminals	20 to 14 AWG;75°C		
Mounting position	Vertical		


Terminal connections

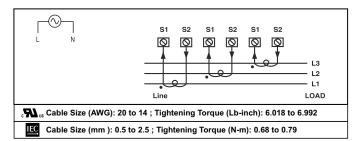

Standards compliance

Category		Standards compliance
ESD Immunity	IEC 61000 - 4 - 2	Level IV (Air discharge : 15kV), (Contact discharge : -8kV)
Surge immunity	IEC 61000 - 4 - 5	+ / - 2kV Common mode, (Line to ground) + / - 1kV differential mode, (Line to line)
Radiated susceptibility	IEC 61000 - 4 - 3	Level III, 80 to 1000MHz (10V / m) Level II, 1.4GHz to 2GHz (3V / m) Level I, 2GHz to 2.7GHz (1V / m)
Conducted susceptibility	IEC 61000 - 4 - 6	Level II (3V / m)
Voltage dips and interruptions	IEC 61000 - 4 - 11	Dips: 0% Residual voltage / 1 Cycle (Criteria B), 40% Residual voltage / 10 Cycles 50Hz / 12 Cycles 60Hz (Criteria C), 70% Residual voltage / 25 Cycles 50Hz / 30 Cycles 60Hz (Criteria C) Interruptions: 0% Residual voltage / 250 Cycles 50Hz / 300 Cycles 60Hz (Criteria C)
Conducted emission	CISPR - 11	
Radiated emission	CISPR - 11	
Electrical fast transient	IEC 61000 - 4 - 4	Level III (2kV)

Dimensions (All are in mm)

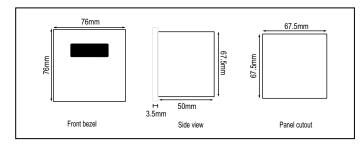

Ordering information

Product code	Supply voltage	Certification
MA2301-110V-CU	110V AC	C€ cULus
MA2301-230V-CE	240V AC	C€