



48x48

72x72


**SPECIFICATIONS**

<b>DISPLAY</b>	<b>DXT53</b> : 3 digit, 0.40" Height, Red 7 segment LED. <b>DXT23</b> : 3 digit, 0.56" Height, Red 7 segment LED.
<b>SET POINT</b>	Single set point.
<b>SUPPLY</b>	90 to 270V AC/DC, 50/60 Hz, 5VA max.
<b>DELAY MODES</b>	On delay / Interval.
<b>TIME RANGES</b>	9.99, 99.9, 999 sec 99.9, 999 min 99.9, 999 hr
<b>TIME SETTING</b>	By push wheel switches.
<b>ACCURACY</b>	±0.05% or 50 msec (whichever is greater).
<b>START INPUT</b>	Pulse Start.
<b>RESET</b>	1)Front panel reset. 2)Remote Reset. 3)On power interruption.
<b>RESET TIME</b>	Less than 100 msec.
<b>COUNT DIRECTION</b>	Down.
<b>LED INDICATION</b>	Relay status
<b>OUTPUT</b>	2 Relay (SPDT)
<b>RELAY RATING</b>	5A @ 250VAC / 24VDC, Resistive
<b>MOUNTING</b>	Panel mounting.
<b>TEMPERATURE</b>	<b>Operating:</b> 0 to 50°C <b>Storage:</b> -5 to 75° C.
<b>HUMIDITY</b>	95% RH (non condensing)
<b>WEIGHT</b>	DXT53 : 120 gms DXT23 : 210 gms

**MECHANICAL INSTALLATION**


PRODUCT CODE		
MODELS	DIGITS	BEZEL SIZE(mm)
DXT53	3	48 x 48
DXT23	3	72 x 72

**OVERALL DIMENSIONS** (All dimensions in mm)

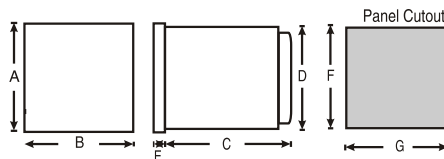

MODELS	DIM						
	A	B	C	D	E	F	G
DXT53	52	52	76	45	3.5	46	46
DXT23	76	76	83.7	67	3.5	69	69

**TIMING DIAGRAM**

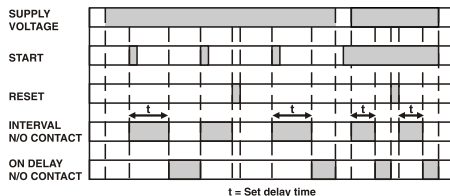

**SAFETY PRECAUTIONS**

Please maintain these instructions and Review them prior to using the unit:

⚠ Warning:


1. This unit is panel mounted type with its output terminals getting connected to the host equipment. Such equipment shall also comply with basic EMI/EMC and safety requirements like BS EN 61326-1 and BS EN 61010 respectively.
2. To avoid electric shock, power supply of the unit should be kept off while wiring. Wiring should be done strictly as per the terminal layout, given in the manual.
3. Use lugged terminals to meet M3 screws.

⚠ Caution:


1. This unit is not intended for outdoor use.
2. The power connection cable must have a cross-section of atleast 1mm<sup>2</sup> and insulation capacity of atleast 1.5kV.
3. The output connections must not be loaded beyond the specified values/range.
4. Avoid inflow of dust and contact of conductive material with the internal circuitry of the unit.
5. The unit must not operate in presence of heating sources, caustic vapors, oil, steam, vibration or impact etc.
6. Use clean soft cloth for cleaning. Do not use any organic solvents like Isopropyl alcohol. Care must be taken to avoid entry of water into the circuitry through the ventilation holes.

## TERMINAL CONNECTIONS

### DXT53



### DXT23



## DIP SWITCH SETTING

### DIP SWITCH SETTINGS FOR MODE

MODE	SW 1
ON DELAY	OFF
INTERVAL	ON

### DIP SWITCH SETTINGS FOR TIME RANGE

RANGE	SW2	SW3	SW4
9.99 sec	OFF	OFF	OFF
99.9 sec	OFF	OFF	ON
999 sec	OFF	ON	OFF
99.9 min	OFF	ON	ON
999 min	ON	OFF	OFF
99.9 hr	ON	OFF	ON
999 hr	ON	ON	ON


### DIP SWITCH SETTING EXAMPLE



Mode - INTERVAL  
Range - 99.9 Sec.

**NOTE :** DIP switch for range and mode settings is on the side of the Instrument.

## LOAD CONNECTIONS



- 1) Snubber Part No.: APRC - 01.
- 2) MOV Part No.: AP-MOV - 03.

Note: For inductive loads, use of snubber and MOV, as shown above, is recommended.

( Specifications are subject to change, since development is a continuous process )

### Selec Controls Pvt. Ltd.

Factory Address : EL-27/1, Electronic Zone , TTC Industrial Area, MIDC, Mahape, Navi Mumbai-400710, India.

Website : [www.selec.com](http://www.selec.com)

For Sales & Support,

Tel. No. : +91-22-41418468 / 452

Mob. No. : +91-9136977315, Email : [sales@selec.com](mailto:sales@selec.com)

For Service,

Tel. No. : +91-7498077172 / +91-7400069545

Email : [service@selec.com](mailto:service@selec.com)

